

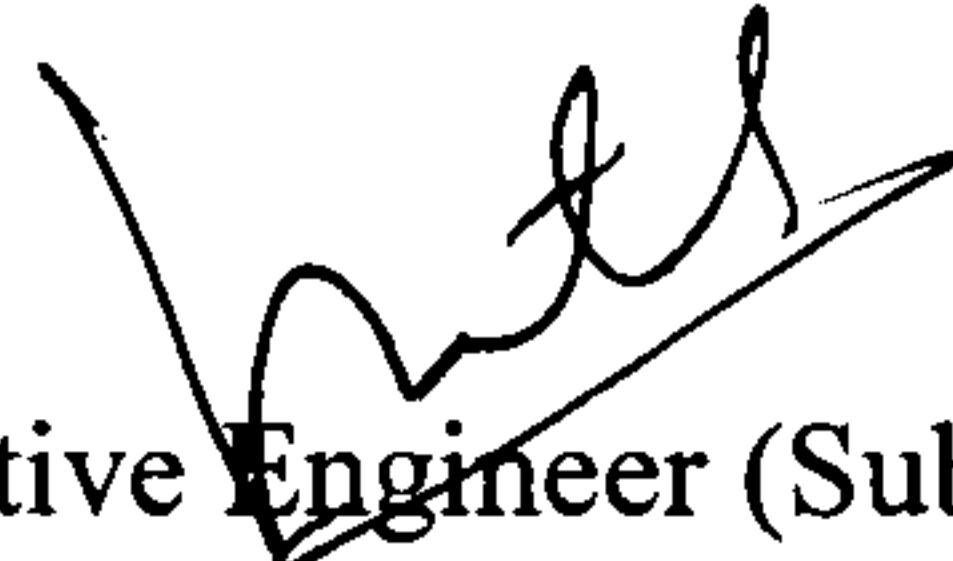
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 09/01/2020 upto 3.00 p.m. for the work of Providing & fixing Three & Two track Aluminum Sliding Windows & louvered windows, providing & fixing glass panes to sliding windows of hall & kitchen, providing & applying synthetic enamel paint to main door & M.S. Grills at 84 T/s PTC Building under S.R. Scheme at R-3 (SRD-S-4), Near Bldg. No. 89, Mankhurd, Mumbai - 43.**
2. **The estimated cost of the work is Rs. 2,85,250.00** (Rupees Two lakhs Eighty Five Thousand Two Hundred Fifty only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Suburbs), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **02/01/2020 to 09/01/2020 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Suburbs)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m.** by **09/01/2020** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 180 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Suburbs)/SPPL as per the rules in force.


Executive Engineer (Suburbs),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Suburbs)/ 11 /2020,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 02 / 01 / 2020

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL, S.E./SPPL for information & necessary action.

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R. Scheme at R-3 (SRD-S-4), Near Bldg. No. 89, Mankhurd, Mumbai - 43.

--- Providing & fixing Three & Two track Aluminum Sliding Windows & louvered windows, providing & fixing glass panes to sliding windows of hall & kitchen, providing & applying synthetic enamel paint to main door & M.S. Grills at 84 T/s PTC Building

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	Bd/W-8, P-587 (It.67, Pg.141 PWD DSR 15-16)	1.00	Removing W.C. pans including disconnecting the sanitary and water supply connections, removing and breaking flooring and bed concrete around pans and removing pan carefully and throwing our the refusal outside etc. complete.	131.00	Rupees One Hundred Thirty One only.	No.	131.00
2	CS-DD-71, Pg.187, (MCGM's Buildings Schedule/Common Schedule 2018)	6.00	Removing existing door or windows with frame and shutters and making good etc. to the existing surface.	563.00	Rupees Five Hundred Sixty Three only.	Nos.	3378.00
3	(It.50, Pg.99, PWD DSR 2015-16)	10.44	Providing and fixing in position extruded modular alluminium section two track Sliding Window mounted on rectangular frame of size 63 mm x 38mm x 2.00 mm thick (1.054 Kg/Rmt) made up of two track drain bottom section of size 61 mm x 45 mm x 1.3 mm thick (1.055 kg/Rmt) and top and sides sections of size 61 mm x 31 mm x 1.3 mm thick (0.659 kg./Rmt.) The shutter should be of bearing bottom of size 40 mm x 18 mm x 1.25 mm thick (0.417 Kg/Rmt) top member of size 40 mm x 18 mm x 1.20 mm thick (0.475 kg/Rmt) Interlocking section size of 43 mm x 27 mm x 1.30 mm thick (0.558 kg/Rmt) and handle section of size 43 mm x 18 mm x 1.30 mm thick (0.424 kg./Rmt), selected quality 5.5 mm thick clear glass to be fixed in shutter with neoprene gasket with approved quality PVC rollers, necessary locks, handles, PVC lining and wooden encasement wherever necessary etc. complete without powder coating.	4567.00	Rupees Four Thousand Five Hundred Sixty Seven only.	Sq.Mt.	47679.48
4	(It.51, Pg.99, PWD DSR 2015-16)	8.64	Providing and fixing in position extruded modular alluminium section Three Track Sliding Window without powder coating made up of three track drain bottom section of size 92mm x 45mm x 1.05mm thick (1.659 Kg/Rmt) three track top and sides sections of size 92mm x 31mm x 1.3mm thick (0.933 Kg/Rmt). The shutter should be bearing bottom of size 40mm x 18mm x 1.25mm thick (0.417 Kg/Rmt) Interlocking section size of 40mm x 18mm x 1.10 mm thick (0.469 Kg/Rmt) handles section of Size 40mm x 18mm x 1.25mm thick (0.417 Kg/Rmt) with 5.5 mm thick selected quality tinted glass in shutter with approved quality neoprene, gasket P.V.C. lining etc. complete (Excluding frame).	4985.00	Rupees Four Thousand Nine Hundred Eighty five only.	Sq.Mt.	43070.40

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
5	R2-CS-RM-5a, Pg.166, (MCGM's Buildings Schedule/Common Schedule 2018)	30.78	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty: Float glass panes of thickness 4 mm.	825.00	Rupees Eight Hundred Twenty Five only.	Sq.Mt.	25393.50
6	(It.54, Pg.101, PWD DSR 15-16)	14.04	Providing and fixing aluminium louvered windows consisting of vertical arm Metre (40x12mm) with holders, lever and locking arrangement wasting at 0.91 Kg/M with 3mm thick sheet glass louvers etc complete. Spec: (As directed by Engineer in-charge)	2476.00	Rupees Two Thousand Four Hundred Seventy Six only.	Sq.mt.	34763.04
7	Item Code CS-PN-4-b, Pg. 56 of MCGM's Buildings Schedule / Common Schedule 2018	231.84	Providing and applying first single coat of approved primer and two coats of synthetic enamel paint/flat oil paint of an approved make and colour as per manufacturers specifications to surfaces specifird below, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting by any approved means etc. complete as directed by Engineer-incharge. For woodwork.	140.00	Rupees One Hundred Forty only.	Sq.mt.	32457.60
8	Item Code CS-PN-4-c, Pg. 56 of MCGM's Buildings Schedule / Common Schedule 2018	347.76	Providing and applying first single coat of approved primer and two coats of synthetic enamel paint/flat oil paint of an approved make and colour as per manufacturers specifications to surfaces specifird below, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting by any approved means etc. complete as directed by Engineer-incharge. For steelwork.	139.00	Rupees One Hundred Thirty Nine only.	Sq.mt.	48338.64
9	(It.-7, Pg-36, PWD DSR 2015-16)	0.43	Providing waterproofing in W.C. and bath including brick bat coba in all positions consisting of specialised materials as per manufacturer's specifications and covering ten years' guarantee on requisite stamp paper including all leads, lifts and curing etc. complete.	4727.00	Rupees Four Thousand Seven Hundred Twenty Seven only.	Cu.Mt.	2032.61
10	(It.No.8, Pg.36) of PWD DSR 2015-16	1.08	Providing waterproof bedding 25 mm thick for flooring of bath and W.C. in cement mortar 1:3 using 1 kg of waterproofing compound of approved make and manufacture per bag of cement including leveling, curing, etc. complete.	484.00	Rupees Four Hundred Eighty Four only.	Sq.Mt.	522.72
11	It.No.78, Pg.143 of PWD DSR 2015-16	1.00	Providing and fixing Steel sink of size 60 x 45 x 25 cm to the kitchen platform including UPVC waste coupling pipe and coupling, making good the damaged surface etc. complete.	4932.00	Rupees Four Thousand Nine Hundred Thirty Two only.	No.	4932.00
12	It.No.26, Pg.219 of PWD DSR 2015-16	63.00	Providing and fixing ASTM Rigid PVC 32 mm pipe.	143.00	Rupees One Hundred Forty Three only.	Rmt.	9009.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
13	Bd/V-20, P-559 (It.-18(a), Pg-129, PWD DSR 2015- 16)	1.00	Providing and fixing Orissa type white glazed earthenware 580 mm x 450 mm water closet pan including trap cast iron soil and vent pipes upto the outside face of the wall including 100 mm. Diameter cast iron plug bend, cement concrete bedding, 10 litres capacity H.D.P.E. flushing cistern with fittings, inlet pipe with stop tap, brackets, 32 mm. diameter galvanised iron heavy type flush pipe with fittings and clamps, painting in gray oil paint to the exposed pipes and cutting and making good the walls and floors etc. complete (Excluding waterproof brick bat coba)	8038.00	Rupees Eight Thousand Thirty Eight only.	No.	8038.00
14	Bd/V-5, P-551 (It.-2(a), Pg-124, PWD DSR 2015- 16)	40.50	Providing and fixing G.I. Pipes 15 mm diameter heavy type having 21.3 mm outer diameter and 1.504 kilogramme per metre weight and having embossed at every metre as ISI mark and name of the manufacturer to walls, ceilings, floors etc. with screwed sockets, backnuts, elbows, tees, reducers, enlargers, plugs, clamps etc. including necessary drilling in holes in walls/slabs etc. and remaking good the demolished portion to restore the same in original condition neatly and applying primer and two coats of white oil painting including existing pipe, if necessary & conveying & stacking the same in P.W.D. chowky or as directed etc. complete.	313.00	Rupees Three Hundred Thirteen only.	R.Mt.	12676.50
15	It.No.58, Pg.220 of PWD DSR 2015-16	168.00	C.I. Grating 100 mm dia.	52.80	Tupees Fifty Two point Eighty only.	No.	8870.40
16	R2-CS-DD-19-b, Pg.182, (MCGM's Buildings Schedule/Common Schedule 2018)	2.00	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead.For thickness of tiles above 25 mm and up to 40 mm	68.00	Rupees Sixty Eight only.	Sq.Mt.	136.00
17	R2-CS-FL-07-a, Pg.63, (MCGM's Buildings Schedule/Common Schedule 2018)	1.68	Providing and laying 8mm thk. ceramic tiles Light coloured glazed ceramic tiles conforming to I.S.15622-2006 for flooring of an approved, quality, make, size and pattern /design, for flooring including cement mortar bedding of 25 mm thick in 1:4 proportion, neat cement float, cutting, leveling, jointing, filling the joints by neat cement slurry or approved colour grout, curing, finishing etc complete as directed by Engineer In Charge.	1701.00	Rupees One Thousand Seven Hundred one only.	Sq.Mt.	2857.68

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
18	(It.16, Pg.39, PWD DSR 2015-16)	0.02	Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts.	690.00	Rupees Six Hundred Ninety only.	Cu.Mt.	13.80
19	(It.60(b), Pg.161, PWD DSR 2015-16)	10.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety Five only.	03 Copies each photo	950.00
Total Rs.							285,250.37
Say Rs.							285,250.00

(Rupees Two Lakhs Eighty Five Thousand Two Hundred Fifty only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____(in words) _____

Signature of Contractor/s


Executive Engineer (Suburbs)/SPPL