

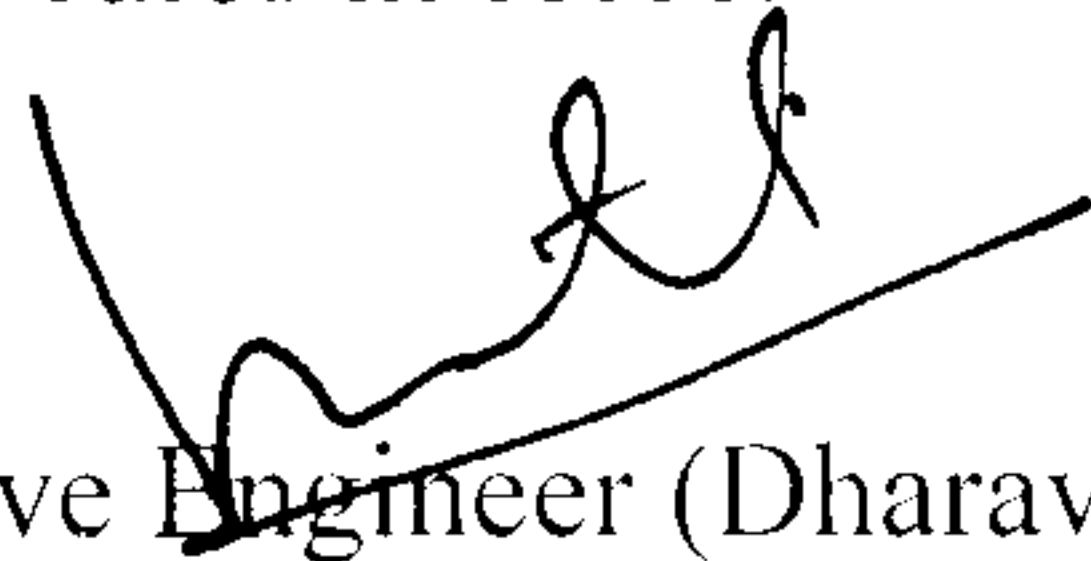
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 13/08/2019 upt 3.00 p.m. for the work of Electrical rectification works in Amenity Building (D6) under S.R. Scheme at Dindoshi bearing CTS No. 827D/4, Dindoshi, Malad (East), Mumbai.**
2. **The estimated cost of the work is Rs. 1,62,561.00** (Rupees One Lakh Sixty Two Thousand Five Hundred Sixty One only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **05/08/2019 to 13/08/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 13/08/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule ‘B’ are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 45 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities. specifications shall be entertained.
11. The entire work is to be completed within **90 days.**
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.


Executive Engineer (Dharavi),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Dharavi)/1028 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 05 / 08 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL and D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

Name of work - Electrical rectification works in Amenity Building (D6) under S.R. Scheme at Dindoshi Mumbai bearing CTS No. 827D/4, Dindoshi, Malad (East), Mumbai.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	It. No. 2-5-23, Page 55 (PWD Electrical DSR 2017-18)	30.00	Supplying & erecting T8 LED 20W tube light fitting (4 feet) with aluminium housing, heat sink, integrated HF electronic driver complete (including lamp)	985.00	Rs. Nine Hundred Eighty Five only.	Each	29550.00
2	R2-ME-4-12-e, (MCGM's M& E SOR 2018)	18.00	Ceiling fan of 1400 mm sweep with all accessories including Electronic Regulator for completing installation	2699.00	Rs. Two thousand six Hundred Ninety nine only.	Each	48582.00
3	R2-ME-4-15-a, (MCGM's M& E SOR 2018)	18.00	'S' type M.S. fan hook fabricated from suitable dia. M.S. rod duly painted for fixing of ceiling fan. The 'S' type hook shall be fixed to steel bar in RCC ceiling. The ceiling shall be replastered with sand, cement & neeru etc. The cost of labours for chipping out ceiling upto steel bar & fixing of 'S' hook & resurfacing the ceiling is included in the cost of item.	306.00	Rs. Three Hundred Six only.	Nos.	5508.00
4	R2-ME-3-27-i of MCGM's Mains and Submains wiring, Point wiring Schedule 2018	18.00	Point wiring by using PVC insulated copper conductors (alongwith same size of pvc insulated copper conductor for earthing & 3 plate ceiling rose) using CASING-N CAPING. For 2/3 Pin Independent Plug (IP).	1182.00	Rs. One thousand One Hundred Eighty Two only.	Each Pt.	21276.00
5	It. No. 1-6-4, Page 22 (PWD Electrical DSR 2017-18)	108.00	Supplying & erecting mains with 2x2.5 sq.mm. and earth wire 1.5 sq.mm FRLS PVC copper wire in rigid PVC conduit min.20mm dia. as per specification No: WG-MA/PC, para no. 1.4.1	153.00	Rs. One Hundred Fifty Three only.	Meter	16524.00
6	It. No. 2-9-4, Page 61 (PWD Electrical DSR 2017-18)	4.00	Supplying and erecting LED street light fitting suitable for above 40W to 48W lamp, including lamp, with PF> 0.95 class IP 65 and above Housing of pressure die cast alluminum alloy and heat sink extruded alluminum complete per specification No. FG-ODF/FLS2	4439.00	Rs. Four Thousand Four Hundred Thirty Nine only.	Each	17756.00
7	It. No. 2-6-5, Page 56 (PWD Electrical DSR 2017-18)	4.00	Supplying & erecting street light wall brackets made from 40 mm dia. B class G.I. pipe, 1.0 m. in length along with pole cap of 300 mm length 100 mm dia duly welded. As per specification no. FG-BKT/BPC.	833.00	Rs. Eight Hundred thirty three only.	Each	3332.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
8	It. No. 7-8-2, Page 159 (PWD Electrical DSR 2017-18)	4.00	Supplying & erecting water tight terminal box of 1.6 mm (16 gauge) CRCA sheet of size 200 x 150 x 150 mm. complete on pole as per specification No. CB-SB	553.00	Rs. Five Hundred Fifty Three only.	Each	2212.00
9	It. No. 5-6-16, Page 112 (PWD Electrical DSR 2017-18)	3.00	Supplying & fixing CRCA sheet Box with earthing terminals for housing 4 Pole RCCB/RCCB+MCB complete on iron frame/laminated board.	292.00	Rs. Two Hundred Ninety Two only.	Each	876.00
10	It. No. 5-6-15, Page 112 (PWD Electrical DSR 2017-18)	3.00	Supplying & fixing CRCA sheet Box with earthing terminals for housing 2 Pole RCCB/RCCB+MCB complete on iron frame/laminated board.	226.00	Rs. Two Hundred Twenty Six only.	Each	678.00
11	It. No. 5-3-9, Page 104 (PWD Electrical DSR 2017-18)	6.00	Supplying, erecting & marking DPMCB 40A to 63A, B- series (for lighting) in provided distribution board	737.00	Rs. Seven Hundred Thirty Seven only.	Each	4422.00
12	It. No. 5-3-3, Page 104 (PWD Electrical DSR 2017-18)	12.00	Supplying, erecting & marking SPMCB 6A to 32A, B- series (for lighting) in provided distribution board as per specification No. SW-SWR/MCB	190.00	Rs. One Hundred Ninety only.	Each	2280.00
13	It. No. 7-2-2, Page 147 (PWD Electrical DSR 2017-18)	45.00	Supplying, erecting & terminating PVC armoured cable 2 core 4 sq mm copper conductor continuous 5.48 sq mm (12 SWG) G.I. earth wire complete erected with glands & lugs, on wall/ trusses/pole or laid in provided trench/ pipe as per specification no. CB-LT/CU	202.00	Rs. Two Hundred Two only.	Meter	9090.00
14	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rs. Ninety Five only.	03 Copies each photo	475.00
Total Rs.							162,561.00
Say Rs.							162,561.00

(Rupees One Lakh Sixty Two Thousand Five Hundred Sixty One only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


 Executive Engineer (Dharavi)/SPPL