

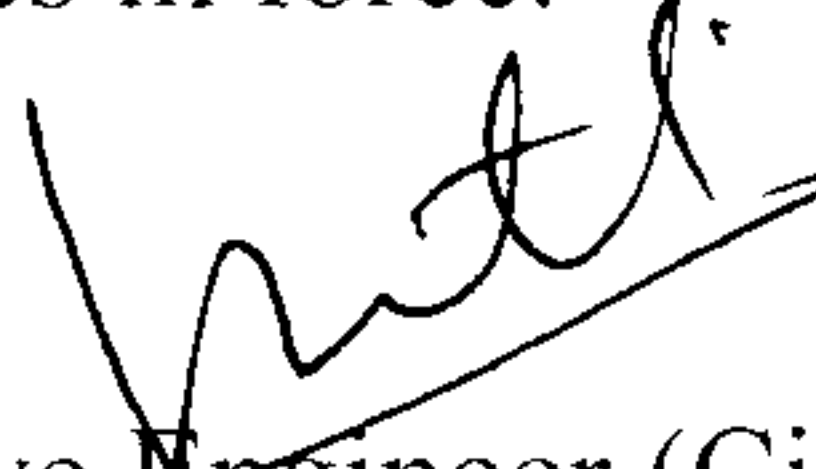
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 19/03/2019 upt 3.00 p.m. for the work of Repairs & rectification work in Room No. 104, 105 and Shop no. 10, 11 & 12 of Rehab Building No. 6, water proofing treatment to existing inspection chambers of Building no. 5 & 6 under S.R Scheme at Rahul Nagar, Sewri, Mumbai.**
2. The estimated cost of the work is **Rs. 2,99,345.00** (Rupees Two Lakhs Ninety Nine Thousand Three Hundred Forty Five only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (City), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **08/03/2019 to 19/03/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (City)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m.** by **19/03/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule ‘B’ are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (City)/SPPL as per the rules in force.


Executive Engineer (City),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(City)/ 388 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 08 / 03 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R Scheme at Rahul Nagar, Sewri, Mumbai.

--- Repairs & rectification work in Room No. 104, 105 and Shop no. 10, 11 & 12 of Rehab Building No. 6, water proofing treatment to existing inspection chambers of Building no. 5 & 6.

: SCHEDULE 'B' :							
Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	R2-CS-RM-37, Pg. 169, (MCGM's Buildings Schedule/Common Schedule 2018)	213.21	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.	14.00	Rupees Fourteen only.	Sq.Mt.	2984.94
2	R2-CS-RM-34, Pg. 168, (MCGM's Buildings Schedule/Common Schedule 2018)	26.25	Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete	11.00	Rupees Eleven only.	Sq.Mt.	288.75
3	R2-CS-PN-3, Pg. 56, (MCGM's Buildings Schedule/Common Schedule 2018)	213.21	Providing and applying first single coat of approved primer and two coats of acrylic distemper (oil bound distemper) of an approved make and colour as per manufacturers specifications to any surface, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting with broom by any approved means, etc. complete as directed by Engineer-in-charge.	98.00	Rupees Ninety Eight only.	Sq.Mt.	20894.58
4	R2-CS-PN-26, Pg. 193, (MCGM's Buildings Schedule/Common Schedule 2018)	26.25	Providing and applying synthetic enamel paint or flat oil paint in any required shade in 3 coats over a primer coat as per manufacturers specifications including scrapping, cleaning the surface etc. Complete.	200.00	Rupees Two Hundred only.	Sq.mt.	5250.00
5	It.54, Pg.160, PWD DSR 2015-16)	41.80	Providing mechanised and manual cleaning of open premises by sweeping, scrubbing, Vaccum cleaning, pressure washing etc. with the help of swingo 755 1st or Nilfisk CA 750, Vaccum cleaner and hard Scrubber for Entrance, Corridor, passage area between work stations and staircase.	1.20	Rupees One point twenty only.	Sq.Mt.	50.16
6	It.35, Pg.65, PWD DSR 2015-16)	66.02	Washing and cleaning any kind of tiled flooring, dado with washing powder and water. (As directed by Engineer in Charge)	13.85	Rupees Thirteen point eighty five only.	Sq.Mt.	914.38

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
7	It.57, Pg.160. PWD DSR 2015-16)	12.24	Providing cleaning the window glasses of Residential/ Non Residential Govt. Building manually and with the help of Back pack Vaccum cleaner and glass cleaning kit etc. complete.	5.00	Rupees five only.	Sq.Mt.	61.20
8	Bd/V-5, P-551 (It.-2(a), Pg-124, PWD DSR 2015- 16)	5.00	Providing and fixing G.I. Pipes 15 mm diameter heavy type having 21.3 mm outer diameter and 1.504 kilogramme per metre weight and having embossed at every metre as ISI mark and name of the manufacturer to walls, ceilings, floors etc. with screwed sockets, backnuts, elbows, tees, reducers, enlargers, plugs, clamps etc. including necessary drilling in holes in walls/slabs etc. and remaking good the demolished portion to restore the same in original condition neatly and applying primer and two coats of white oil painting including existing pipe, if necessary & conveying & stacking the same in P.W.D. chowky or as directed etc. complete.	313.00	Rupees Three Hundred Thirteen only.	R.Mt.	1565.00
9	Bd/V-30 (It.23(a), Pg.131, PWD DSR 2015-16)	2.00	Providing and fixing white glazed earthenware wash hand basin of 55 cm x 40 cm size including one cold water pillar tap, brackets, rubber plugs and brass chain, stop tap and necessary pipe connection including bottle trap and polyethylene waste water pipe upto the out side face of the wall, making good the damaged surface, testing etc. complete.	4345.00	Rupees Four Thousand Three Hundred Forty Five only.	Each	8690.00
10	Bd/V-8 (It.5, Pg.126, PWD DSR 2015-16)	8.00	Providing & fixing heavy type 12 mm dia. Screw down bib/stop tap of brass including socket, union nut, etc. complete.	418.00	Rupees Four Hundred Eighteen only.	No.	3344.00
11	(It.50, Pg.138, PWD DSR 2015-16)	2.00	Providing and fixing H.D.P.E. Flushing Tank of approved quality, including removing the existing tank and disconnecting and reconnecting to water supply and drainage pipes and making good the deficiencies etc. complete.	1966.00	Rupees One Thousand Nine Hundred Sixty Six only.	No.	3932.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
12	R2-CS-PS-27-b, Pg.138, (MCGM's Buildings Schedule/Common Schedule 2018)	2.00	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete. Flexible pipe 40 mm dia.	87.00	Rupees Eighty Seven only.	Each	174.00
13	(It.175, Pg.225, PWD DSR 2015-16)	4.00	Providing and fixing PVC trap grating.	187.00	Rupees One Hundred Eighty Seven only.	No.	748.00
14	R2-CS-RM-5a, Pg.166, (MCGM's Buildings Schedule/Common Schedule 2018)	0.18	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty: Float glass panes of thickness 4 mm.	825.00	Rupees Eight Hundred Twenty Five only.	Sq.Mt.	148.50
15	(It.239, Pg.227, PWD DSR 2015-16)	2.00	Providing & fixing CPVC Coupling 50 mm dia.	132.00	Rupees One Hundred Thirty Two only.	Per No.	264.00
16	R2-CS-DD-71, Pg.187, (MCGM's Buildings Schedule/Common Schedule 2018)	4.00	Removing existing door or windows with frame and shutters and making good etc. to the existing surface.	563.00	Rupees Five Hundred Sixty Three only.	Nos.	2252.00
17	(Bd/T-56, P-510, It.No.58(a), Pg.101) of PWD DSR 2015-16	14.28	Providing and fixing rolling steel shutter fabricated from 18/19 gauge steel laths with side guides, bottom rail, brackets, door suspension shaft including rolling springs, locking arrangement and housing box at the top with one coat of red lead primer etc. complete	2719.00	Rupees Two Thousand Seven Hundred Nineteen only.	Sq.Mt.	38827.32
18	R2-CS-DD-19-b, Pg.182, (MCGM's Buildings Schedule/Common Schedule 2018)	30.30	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles above 25 mm and up to 40 mm	68.00	Rupees Sixty Eight only.	Sq.Mt.	2060.40

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
19	R2-CS-DD-3, Pg.180, (MCGM's Buildings Schedule/Common Schedule 2018)	2.26	Demolishing brick work in lime or cement mortar including plaster, paint, etc. manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge.	484.00	Rupees Four Hundred Eighty Four only.	Cu.Mt.	1093.84
20	R2-CS-DD-65, Pg.187, (MCGM's Buildings Schedule/Common Schedule 2018)	15.50	Removing cement plaster of any finish from the wall, complete with racking out the joints to a depth of 20 mm.	147.00	Rupees One Hundred Forty Seven only.	Sq.Mt.	2278.50
21	(It.6, Pg.54, PWD DSR 15-16)	15.50	Providing sand faces plaster externally using approved screened sand in all positions including base coat of 15 mm thick in cement mortar 1:4 using water proofing compound at the rate of 1 Kilogramme per cement bag and curing the same for not less than two days and keeping the surface of base coat rough to receive the sand faced treatment not to exceed 8 mm thickness in cement mortar 1:4, finishing the surface by taking out grains and curing for 14 days and scaffolding etc. complete.	623.00	Rupees Six Hundred Twenty Three only.	Sq.Mt.	9656.50
22	Bd/A-4, P-259 (It.-3, Pg-5, PWD DSR 2015-16)	2.71	Excavation for foundation in soft rock and old cement or lime masonry foundations including removing the excavated materials upto a distance of 50 meters beyond the building area and lift upto 1.50 meters, stacking as directed including dewatering unless provided elsewhere, preparing the bed for the foundation and necessary backfilling with available earth, murum, ramming, watering complete excluding shoring and strutting.	630.00	Rupees Six Hundred Thirty only.	Cu.Mt.	1707.30
23	Bd/E-1, P-287 (It.-1(d), Pg-13, PWD DSR 2015-16)	2.71	Providing and laying in position in situ plain cement concrete M-15 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate, retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering, shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete.	6753.00	Rupees Six Thousand Seven Hundred Fifty Three only.	Cu.Mt.	18300.63

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
24	R2-CS-FL-01-c, Pg.61, (MCGM's Buildings Schedule/Common Schedule 2018)	27.12	Providing and laying polished natural stone 25 to 30 mm thk. Kota stone of size 0.430m x0.56m (17"x22") (Machine cut) of an approved quality and size for paving /flooring in plain and/or diamond /approved pattern including cement mortar bedding of 25 mm thick in 1:4 proportion, cement float, machine cutting, dressing, leveling, jointing, filling the joints with neat cement slurry or with required pigment, machine polishing at site, curing, finishing, etc complete as directed by Engineer In Charge.	1179.00	Rupees One Thousand One Hundred Seventy Nine only.	Sq.Mt.	31974.48
25	R2-CS-FL-28-d, Pg.71, (MCGM's Buildings Schedule/Common Schedule 2018)	3.18	Providing and fixing polished natural stone tiles 25 to 30mm thk. Kota stone of approved quality, pattern and colour for dado including preparing the surface and levelling in the desired line, backing of 20 thk. cement mortar in porportion 1:3, square cut top edge or chamfered top edge in cement mortar 1:3, cement float, machine cutting, leveling, jointing, filling the joints with neat cement or pigment mixed with cement, polishing, finishing, curing etc complete as directed by Engineer In Charge.	1559.00	Rupees One Thousand Five Hundred Fifty Nine only.	Sq.Mt.	4957.62
26	R2-SE-11-1, Page 24 (MCGM's SE SOR 2018)	2.81	Desilting functioning / non-functioning of sewers of any size and shape upto any depth by any means including pumping out liquid waste or sewage, plugging, diverting the flow in the drain if necessary and stacking the removed silt in the depots as directed within radius of 300meters including taking precautionary and safety measures such as test forgases, preading bleaching powder on the depot of the removed silt etc. complete or as directed (For payment purpose 30% voids for silt would be deducted and for stone or boulders 40% would be deducted on the depot measurement).	1525.00	Rupees One Thousand Five Hundred Twenty Five only.	Cu.Mt.	4285.25
27	R2-SE-11-2, Page 24 (MCGM's SE SOR 2018)	26.40	Systematically cleaning / functioning / non-functioning sewer of 150 mm dia to 230mm dia sewer by passing ropes knots, bamboo kamti and disc.of required size as directed and specified including safety measures such as tests forgases, use of safety belts, dry cell, touches,or lighting in manholes & drains as directed and specified-do- -do- as per item No. SE-11-1	77.00	Rupees Seventy Seven only.	R.mt.	2032.80

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
28	R2-CS-WP-41, Page 52 (MCGM's Buildings Schedule/Common Schedule 2018)	49.30	Providing Waterproofing treatment as per item No. CS-WP-40 to the brickwall of existing water Closets, bathroom, kitchens, washing places, sanitary blocks etc. by removing existing plaster and tiles etc.	1672.00	Rupees One Thousand Six Hundred Seventy Two only.	Sq.Mt.	82429.60
29	R2-CS-RF-9, Page 190 (MCGM's Buildings Schedule/Common Schedule 2018)	99.00	IPS and non-structural cracks with non-shrink compound using spatula or putty knife.	297.00	Rupees Two Hundred Ninety Seven only.	Rft.	29403.00
30	R2-CS-RF-11, Page 190 (MCGM's Buildings Schedule/Common Schedule 2018)	22.00	Injection Grouting High Performance Polymer Cement Grout: Providing & injecting high performance non shrink, Anti-washout Polymer Cement Grout per pack of 225gm for 50kg bag of cement as per manufacturer's specifications into honeycombing area / porous concrete with suitable pump at pressure of 2.0 Kg/Cm2 and subsequently cutting /removal of nozzles and sealing of holes with grout etc., complete.This does not include the rate of cement bag.	409.00	Rupees Four Hundred Nine only.	Per 50 kg bag of cement	8998.00
31	(It.3, Pg.203, PWD DSR 2015-16)	22.00	Providing & supplying Cement Grey O.P.C.	325.00	Rupees Three Hundred Twenty Five only.	Bag	7150.00
32	(It.16, Pg.39, PWD DSR 2015-16)	3.12	Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts.	690.00	Rupees Six Hundred Ninety only.	Cu.Mt.	2152.80

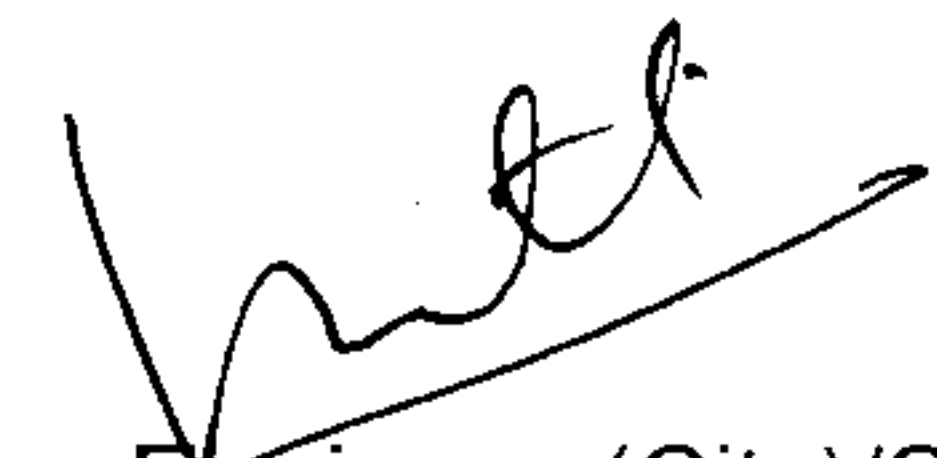
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
33	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety five only.	03 Copies each photo	475.00
Total Rs.							299,344.55
Say Rs.							299,345.00

(Rupees Two lakhs ninety nine thousand three hundred forty five only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


Executive Engineer (City)/SPPL