

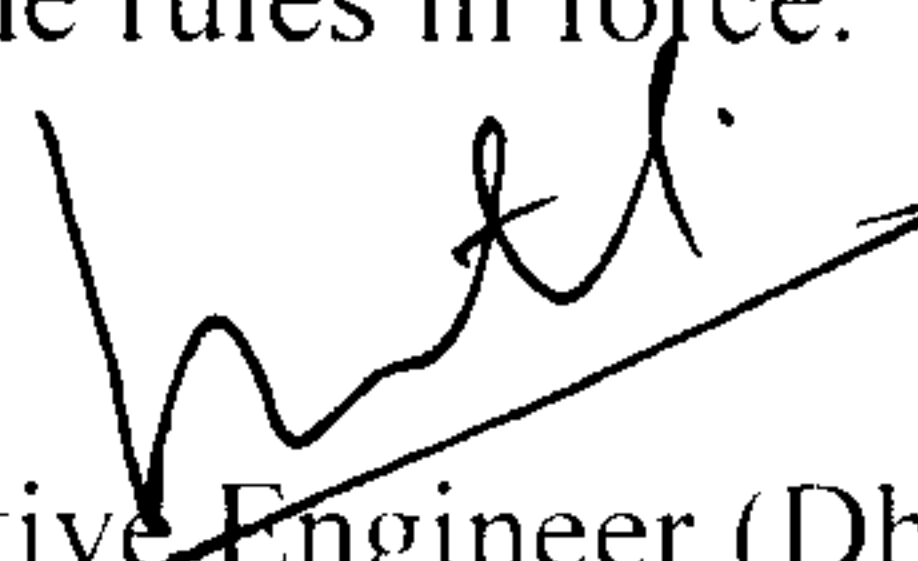
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 26/03/2020 upto 3.00 p.m. for the work of Point wiring for light/ fan/bell/power point and independent plug point, providing & fixing step regulator for fan and step regulator for fan and supplying & fixing 32 Amp DPMCB in 26 T/s, Providing & fixing waterproof plywood in meter room, Supplying waterproof plywood in meter room, Supplying & erecting T8 LED 20W tube light fitting (4 feet), supplying and erecting mains with 2 x 4 sq.mm copper wire, etc. complete at PTC Building (Royal Apartment) under S.R. Scheme at Malad West, Mumbai.**
2. **The estimated cost of the work is Rs. 1,74,040.00** (Rupees One lakh Seventy Four Thousand Forty only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **19/03/2020 to 26/03/2020 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai - 400 051 upto **3.00 p.m.** by **26/03/2020** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days**.

12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.
13. The rates quoted shall be inclusive of all taxes. Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Suburbs)/SPPL as per the rules in force.


Executive Engineer (Dharavi),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Dharavi)/ 367 /2020.
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E).
Mumbai- 400 051.

Date : 19 / 03 / 2020

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL, S.E./SPPL for information & necessary action.

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : Point wiring for light / fan / bell / power point and independent plug point, providing & fixing step regulator for fan and step regulator for fan and supplying & fixing 32 Amp DPMCB in 26 T/s, Providing & fixing waterproof plywood in meter room, Supplying waterproof plywood in meter room, Supplying & erecting T8 LED 20W tube light fitting (4 feet), supplying and erecting mains with 2 x 4 sq.mm copper wire, etc. complete at PTC Building (Royal Apartment) under S.R. Scheme at Malad West, Mumbai.

: SCHEDULE 'B' :

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	R2-ME-3-27-a, of MCGM's Mains and Submains wiring. Point wiring Schedule 2018-	36.00	Point wiring by using PVC insulated copper conductors (alongwith same size of pvc insulated copper conductor for earthing & 3 plate ceiling rose) using CASING-N CAPING. For Light/Fan / Ex. Fan Points.	692.00	Rupees Six hundred Ninety Two only.	Each Pt.	24912.00
2	R2-ME-3-27-c, of MCGM's Mains and Submains wiring. Point wiring Schedule 2018	4.00	Point wiring by using PVC insulated copper conductors (alongwith same size of pvc insulated copper conductor for earthing & 3 plate ceiling rose) using CASING-N CAPING. For Bell Point with Bell / Buzzer & 1 Bell Push.	971.00	Rupees Nine hundred seventy one only.	Each Pt.	3884.00
3	R2-ME-3-27-i, of MCGM's Mains and Submains wiring. Point wiring Schedule 2018	30.00	Point wiring by using PVC insulated copper conductors (alongwith same size of pvc insulated copper conductor for earthing & 3 plate ceiling rose) using CASING-N CAPING. For 15 / 5 A / 6 A Combined Power Plug Socket Point with Fuse and Indicating Lamp, One 15 Amp SP Switch.	1182.00	Rupees One Thousand One Hundred Eighty Two only.	Each Pt.	35460.00
4	ME-4-12-t of MCGM's Mains and Submains wiring. Point wiring SOR 2018	26.00	Supply and fixing of Step type Electronic Fan Regulator minimum rated for 100W	448.00	Rupees Four Hundred Forty Eight only.	No.	11648.00
5	R2-ME-1-17-i, of MCGM's Mains and Submains wiring. Point wiring Schedule 2018	29.00	Unit rate of 240V/415V. 'C' Curve. 10kA, Miniature circuit breaker suitable for DB mounting complete with connection, testing & commissioning etc. as required. 32A DP MCB.	995.00	Rupees Nine Hundred Ninety Five only.	Nos.	28855.00
6	It.97, Pg.112. PWD DSR 2015-16)	8.91	Providing and fixing shutter to wall cupboard made from 12mm thick Marine ply. Panel with of paint face and approved colour laminated face form outer side including lipping beading, brass oxidised fixtures and fastenings etc. complete	2563.00	Rupees Two Thousand Five Hundred Sixty Three only.	Sq.Mt.	22836.33
7	It. No. 1-3-8. Page 16 (PWD Electrical DSR 2017-18)	65.00	Supplying & erecting mains with 2x4 sq mm F.R.L S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No WG-MA/BW	89.00	Rupees Eighty Nine only.	Meter	5785.00


Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
8	Rate Analysis (As per wording of Item)	26.00	Liasoning with Adani for installation of electric meters in meter room by submitting test report of licensed electrical contractor etc. complete.	750.00	Rupees Seven Hundred Fifty only.	Each	19500.00
9	It. No. 2-5-23, Page 55 (PWD Electrical DSR 2017-18)	21.00	Supplying & erecting T8 LED 20W tube light fitting (4 feet) with aluminium housing, heat sink, integrated HF electronic driver complete (including lamp)	985.00	Rupees Nine Hundred Eighty Five only.	Each	20685.00
10	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety Five only.	03 Copies, each photo	475.00
Total Rs.							174,040.33
Say Rs.							174,040.00

(Rupees One Lakh Seventy Four Thousand Forty only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


 Executive Engineer/SPPL