

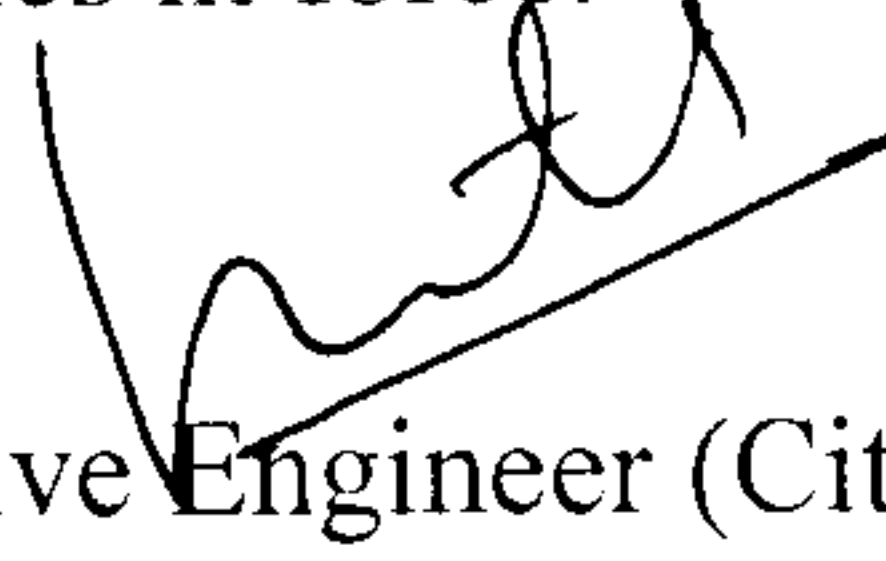
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 13/03/2019 upt 3.00 p.m. for the work of Providing & laying in position in situ plain cement concrete M-15 for pavement, constructing water meter chambers, Providing and fixing Country Teak Wood frame with 35 mm thick solid core B.W.P. flush door shutters at terrace, Providing and fixing aluminum to flush door shutter using 24 G aluminum sheet at Sale Bldg. No. 2 under S.R Scheme at Rahul Nagar, Sewri, Mumbai.**
2. The estimated cost of the work is **Rs. 2,98,976.00** (Rupees Two Lakhs Ninety Eight Thousand Nine Hundred Seventy Six only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (City), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **06/03/2019 to 13/03/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (City)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m.** by **13/03/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days.**
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.,
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (City)/SPPL as per the rules in force.


Executive Engineer (City),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(City)/ **378** /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 06 / 03 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R Scheme at Rahul Nagar, Sewri, Mumbai.

--- Providing & laying in position in situ plain cement concrete M-15 for pavement, constructing water meter chambers,
 Providing and fixing Country Teak Wood frame with 35 mm thick solid core B.W.P. flush door shutters at terrace,
 Providing and fixing aluminium to flush door shutter using 24 G aluminium sheet at Sale Bldg. No. 2.

| : SCHEDULE 'B' : | | | | | | | |
|------------------|---|----------|--|-----------|--|--------|----------|
| Item. No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
| | | | | In Figure | In words | | |
| 1 | R2-CS-EW-3, Page 3 of MCGM's Building Schedule/Common Schedule 2018 | 20.24 | Excavation for foundation, substructures, basements, tanks, sumps, walls, chambers, manholes, trenches, poles, pits & general building works in soft/ disintegrated rock, sand stone, stiff clay, gravel, cobblestone, hard laterite, water bound macadam, wet mix macadam, asphalt mix carpet of any type, pitching, soling, paths and hardcore, lime concrete, plain cement concrete, stone masonry and all types of brick/ block masonry below ground level, rock boulders, etc. for depths/ lifts upto 1.5M measured from the ground level, including dressing/ trimming the sides, leveling of bottoms, manual dewatering, removing rank vegetation, backfilling in layers not more than 200mm thickness, watering, consolidating, compacting to achieve not less than 97% Modified Proctor density conforming to relevant IS, stacking in measurable heaps for future use within owners space or disposing within an initial lead of 150m as directed, loading, unloading, leveling excluding shoring, strutting etc. complete as directed by Engineer-in-Charge. Note: 1) The rate includes the handling/supporting the existing utilities such as cables, drains, pipes, water mains etc. 2) It also includes the royalty and other taxes if any | 500.00 | Rupees Five Hundred only. | Cu.Mt. | 10120.00 |
| 2 | R2-CS-DD-85, (MCGM's Building Schedule/Common Schedule 2018) | 1.00 | Cutting down small tree over 230 mm. dia. of girth (measured at a height of 1m above ground level) including cutting of branches and trunks, removing of roots completely, disposal of unserviceable material and depositing the serviceable or cut materials to respective Ward Office as directed. | 1447.00 | Rupees One Thousand Four Hundred Forty Seven only. | Plant | 1447.00 |

| Item. No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
|-----------|--|----------|---|-----------|---|--------|-----------|
| | | | | In Figure | In words | | |
| 3 | R2-CS-DD-71, Pg.187, (MCGM's Buildings Schedule/Common Schedule 2018) | 4.00 | Removing existing door or windows with frame and shutters and making good etc. to the existing surface. | 563.00 | Rupees Five Hundred Sixty Three only. | Nos. | 2252.00 |
| 4 | Bd/E-1, P-287 (lt.-1(d), Pg-13, PWD DSR 2015-16) | 13.20 | Providing and laying in position in situ plain cement concrete M 15 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate, retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering, shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete. | 6753.00 | Rupees Six Thousand Seven Hundred Fifty Three only. | Cu.Mt. | 89139.60 |
| 5 | H-8-7-b, Page 56 (MCGM's HE Schedule 2013) | 5.00 | Constructing meter chambers for 80 mm size meters as per Standard MCGM issue drawing etc. complete in all respect and as directed by Engineer in Charge (Bedding of 1:2:4 c.c.) At party's cost | 23776.00 | Rupees Twenty Three Thousand Seven Hundred Seventy Six only. | Nos. | 118880.00 |
| 6 | lt.1, Bd/T-2, P-478, Pg.89, PWD DSR 2015-16) | 0.190 | Providing and fixing Country Teak Wood frame as per drawing for second class doors without ventilators, windows, fanlights, etc. including all mouldings, rebating, holdfasts and finishing with one coat of primer complete. | 118684.00 | Rupees One Lakh Eighteen Thousand Six Hundred Eighty Four only. | Cu.Mt. | 22549.96 |
| 7 | R2-CS-WW-06-c, Page 104 of MCGM's Building Schedule/Common Schedule 2018 | 7.38 | Providing and fixing superior quality single leaf B.W.P. grade solid core flush door 35mm thick shutter shutters of standard make conforming to IS:2202- 1991 (Part I & II) including one coat of primer, putty and 2 coats of synthetic enamel paint on both faces etc. with 12 mm thk teak wood lipping all around all around etc. complete (Hinges, aldrop & standard door hardware to be paid separately) | 2131.00 | Rupees Two Thousand One Hundred Thirty One only. | Sq.Mt. | 15726.78 |

| Item. No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
|-----------|--|----------|--|-----------|--|--------|---------|
| | | | | In Figure | In words | | |
| 8 | R2-CS-HW-04, Page 117 of MCGM's Building Schedule/Common Schedule 2018 | 12.00 | Providing and fixing butt hinges 100 mm Long. manufactured as per relevant IS for door & windows with necessary materials and labour costs etc. complete. | 134.00 | Rupees One Hundred Thirty Four only. | Nos. | 1608.00 |
| 9 | R2-CS-HW-06-c-2, Page 119 of MCGM's Building Schedule/Common Schedule 2018 | 4.00 | Providing and fixing aldrops of 16 mm diameter bars 300 mm long manufactured as per IS:2681-1991, wherever they apply for doors and windows with necessary materials and labour etc. complete. | 398.00 | Rupees Three Hundred Ninety Eight only. | Nos. | 1592.00 |
| 10 | R2-CS-HW-08-b-2, Page 120 of MCGM's Building Schedule/Common Schedule 2018 | 4.00 | Providing and fixing tower bolts 150 mm long as described below conforming to IS:204- 1992 (Part I,II) for doors & windows with necessary materials and labour etc. complete. | 90.00 | Rupees Ninety only. | Nos. | 360.00 |
| 11 | R2-CS-HW-09-d-1, Page 121 of MCGM's Building Schedule/Common Schedule 2018 | 4.00 | Providing and fixing handles 100 mm long as described below, manufactured as per IS:204-1992 (Part I,II) for doors & windows with necessary materials and labour etc. complete. | 64.00 | Rupees Sixty Four only. | Nos. | 256.00 |
| 12 | R2-SE-11-1 (MCGM's SE SOR 2018) | 1.53 | Desilting functioning / non-functioning of sewers of any size and shape upto any depth by any means including pumping out liquid waste or sewage, plugging, diverting the flow in the drain if necessary and stacking the removed silt in the depots as directed within radius of 300meters including taking precautionary and safety measures such as test for gases, spreading bleaching powder on the depot of the removed silt etc. complete or as directed (For payment purpose 30% voids for silt would be deducted and for stone or boulders 40% would be deducted on the depot measurement). | 1525.00 | Rupees One Thousand Five Hundred Twenty Five only. | Cu.Mt. | 2333.25 |
| 13 | R2-SE-11-2 (MCGM's SE SOR 2018) | 10.80 | Systematically cleaning / functioning / non-functioning sewer of 150 mm dia to 230mm dia sewer by passing ropes knots, bamboo kamti and disc. of required size as directed and specified including safety measures such as tests for gases, use of safety belts, dry cell, torches, or lighting in manholes & drains as directed and specified-do- -do- as per item No. SE-11-1 | 77.00 | Rupees Seventy Seven only. | R.mt. | 831.60 |

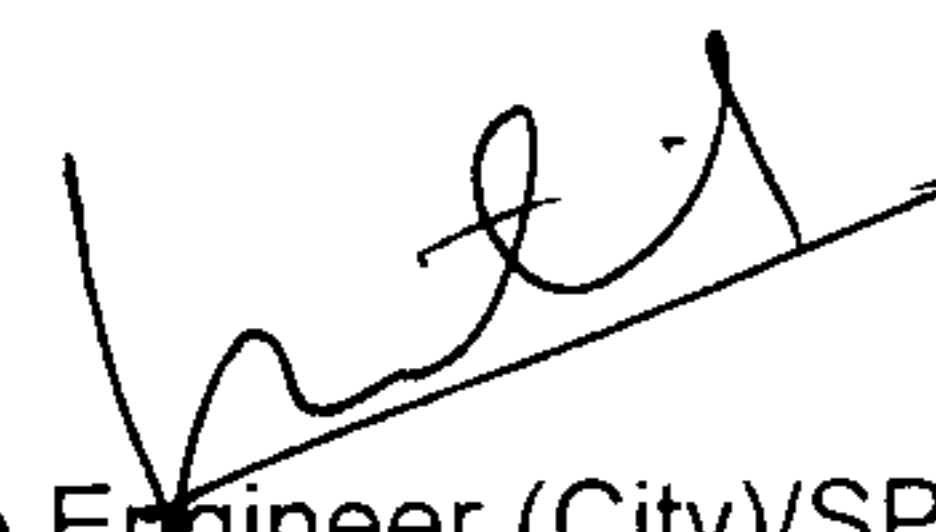
| Item. No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
|------------------|--|----------|---|-----------|--|----------------------|-------------------|
| | | | | In Figure | In words | | |
| 14 | (It.16, Pg.39. PWD DSR 2015-16) | 22.92 | Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts. | 690.00 | Rupees Six Hundred Ninety only. | Cu.Mt. | 15814.80 |
| 15 | R2-CS-RM-89, Page 174 of MCGM's Building Schedule/Common Schedule 2018 | 16.80 | Providing and fixing aluminium kickplate of required width to flush and any door shutter using 24 G aluminium sheet with 3 coats of painting etc. complete. | 928.00 | Rupees Eight Thousand Nine Hundred Ninety Four only. | Sq.Mt. | 15590.40 |
| 16 | (It.60(b), Pg.161, PWD DSR 2015-16) | 5.00 | Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size) | 95.00 | Rupees Ninety five only. | 03 Copies each photo | 475.00 |
| Total Rs. | | | | | | | 298,976.39 |
| Say Rs. | | | | | | | 298,976.00 |

(Rupees Two lakhs ninety eight thousand nine hundred seventy six only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


Executive Engineer (City)/SPPL