

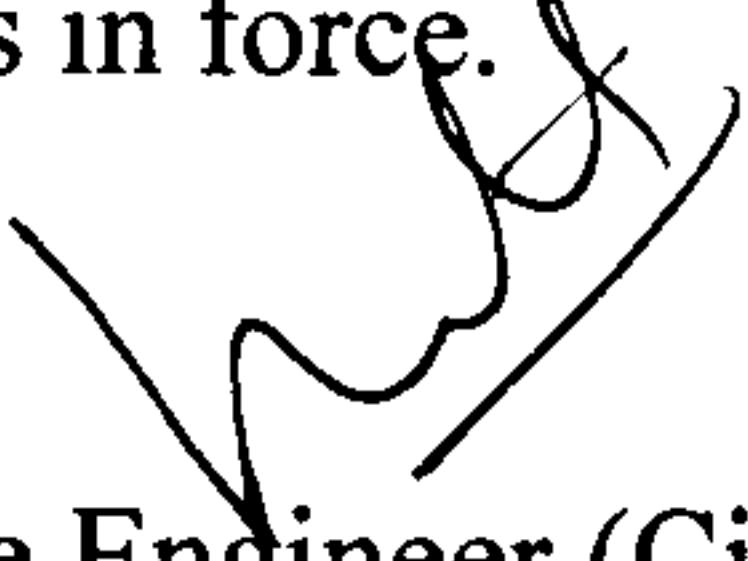
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 31/01/2019 upt 3.00 p.m. for the work of Removing damaged W.C. pans, providing & fixing new W.C. pan, providing & fixing 100 mm dia. & 75 mm dia. C.I. pipes for W.C. & Kitchen, providing & fixing 25 mm dia. gate valves at terrace, providing & fixing kadappa door sills etc. at A3 Building Antop Hill, Wadala, Mumbai.**
2. **The estimated cost of the work is Rs. 2,98,918.00 (Rupees Two Lakhs Ninety Eight Thousand Nine Hundred Eighteen only).**
3. The quotations in sealed cover shall be addressed to the Executive Engineer (City), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **24/01/2019 to 31/01/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (City)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 31/01/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (City)/SPPL as per the rules in force.


Executive Engineer (City),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(City)/ 160 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 24 / 01 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : Removing damaged W.C. pans, providing & fixing new W.C. pan, providing & fixing 100 mm dia. & 75 mm dia. C.I. pipes for W.C. & Kitchen, providing & fixing 25 mm dia. gate valves at terrace, providing & fixing kadappa door sills etc. at A3 Building Antop Hill, Wadala, Mumbai.

: SCHEDULE 'B' :							
Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	Bd/W-8, P-587 (It.67, Pg.141 PWD DSR 15-16)	7.00	Removing W.C. pans including disconnecting the sanitary and water supply connections, removing and breaking flooring and bed concrete around pans and removing pan carefully and throwing our the refusal outside etc. complete.	131.00	Rupees One Hundred Thirty One only.	No.	917.00
2	R2-CS-WP-31, Pg.49, (MCGM's Buildings Schedule/Common Schedule 2018)	3.02	Extra for providing additional thickness of brickbats over 100 mm in 1:5 c.s. either due to location of rain water pipes or due to increase in the travel length of flow of rain water or brick bats required in the sunk portion of baths, W.C.s nahani etc. The rate includes for fixing brickbats in C.M., with waterproofing compound as per specification as directed.	8575.00	Rupees Eight Thousand Five Hundred Seventy Five only.	Cu.Mt.	25896.50
3	R2-CS-WP-38-a, Pg.51, (MCGM's Buildings Schedule/Common Schedule 2018)	7.56	Providing waterproofing treatment through specialized agencies to the dado portion of the R.C.C. side walls upto 1.5 m height from floor area of water closets, bath-rooms, kitchens, washing places, sanitary blocks etc. by giving „INJECTIONS“ treatment with waterproofing compound and cement solution. The walls will then be plastered with waterproof cement plaster in 1:4 c.s. 12 mm to 15 mm thk. Finally the walls shall be covered with jointless waterproof plaster in 1:3 c.s. 12 to 15 mm thick finished rough for receiving tiles. The average thickness of complete treatment shall not be less than 25 mm. (The actual treated area will be measured and paid for).	793.00	Rupees Seven Hundred Ninety Three only.	Sq.Mt.	5995.08
4	Bd/V-20, P-559 (It.- 18(a), Pg-129, PWD DSR 2015- 16)	7.00	Providing and fixing Orissa type white glazed earthenware 580 mm x 450 mm water closet pan including trap cast iron soil and vent pipes upto the outside face of the wall including 100 mm. Diameter cast iron plug bend, cement concrete bedding, 10 litres capacity H.D.P.E. flushing cistern with fittings, inlet pipe with stop tap, brackets, 32 mm. diameter galvanised iron heavy type flush pipe with fittings and clamps, painting in gray oil paint to the exposed pipes and cutting and making good the walls and floors etc. complete (Excluding waterproof brick bat coba) Note: Less - Flushing Tank Rs.1966/- ((It.50, Pg.138, PWD DSR 2015-16)) : i.e. Rs.8,038.00 - Rs.1966.00 = Rs. 6072.00	6072.00	Rupees Six thousand seventy two only.	No.	42504.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
5	R2-CS-FL-07-a, Pg.63, (MCGM's Buildings Schedule/Common Schedule 2018)	7.56	Providing and laying 8mm thk. ceramic tiles Light coloured glazed ceramic tiles conforming to I.S.15622-2006 for flooring of an approved, quality, make, size and pattern /design, for flooring including cement mortar bedding of 25 mm thick in 1:4 proportion, neat cement float, cutting, leveling, jointing, filling the joints by neat cement slurry or approved colour grout, curing, finishing etc complete as directed by Engineer In Charge.	1701.00	Rupees One thousand seven hundred one only.	Sq.Mt.	12859.56
6	R2-CS-FL-45, Page 79 of MCGM's Building Schedule/Common Schedule 2018	5.93	Providing and constructing raised platform of 750 mm wide and 600 to 750mm high using minimum 40mm thick polished kadappa stone slab of approved quality at top, supported by both side polished, 40mm thk. and 700mm wide kadappa spaced at not more than 1200mm clear, including polished kadappa facia of min. 75mm high with chamfered at the top edges, making opening for sink and fixing the same in position, preparing the surface and levelling in the desired line, machine cutting, jointing in approved adhesives, leveling, smooth cement plastering along the sides to match the existing surface in cement mortar, filling the joints with pigment mixed with cement, cleaning, finishing, curing etc complete as directed by Engineer In Charge. (Sink will be paid separately)	2401.00	Rupees Two thousand four hundred one only.	R.Mt.	14237.93
7	R2-CS-PN-26, Pg. 193, (MCGM's Buildings Schedule/Common Schedule 2018)	10.17	Providing and applying synthetic enamel paint or flat oil paint in any required shade in 3 coats over a primer coat as per manufacturers specifications including scrapping, cleaning the surface etc. Complete.	200.00	Rupees Two hundred only.	Sq.mt.	2034.00
8	Bd/E-1, P-287 (It.-1(d), Pg-13, PWD DSR 2015-16)	0.09	Providing and laying in position in situ plain cement concrete M-15 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate, retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering, shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete.	6753.00	Rupees Six thousand seven hundred fifty three only.	Cu.Mt.	607.77

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
9	R2-CS-FL-38-b, Page 74 of MCGM's Building Schedule/Common Schedule 2018	6.10	Providing and fixing polished natural stone slab as specified below of approved quality, pattern and colour for treads including preparing the surface and levelling in the desired line, in cement mortar 1:4, cement float, machine cutting, leveling, jointing, smooth cement plastering along the sides to match the existing surface in cement mortar 1:3, filling the joints with neat cement or pigment mixed with cement, polishing, finishing, curing etc complete as directed by Engineer In Charge.	685.00	Rupees Six hundred eighty five only.	Rmt.	4178.50
10	R2-CS-FL-21, Page 67 of MCGM's Building Schedule/Common Schedule 2018	10.40	Providing and fixing polished natural stone tiles /slab as specified below of approved quality, pattern and colour for flush/projected skirting and risers including preparing the surface and levelling in the desired line, backing of 20 thk. cement mortar in porportion 1:3, square cut top edge or chamfered top edge in cement mortar 1:3, cement float, machine cutting, leveling, jointing, filling the joints with neat cement or pigment mixed with cement, polishing, finishing, curing etc complete as directed by Engineer In Charge.	232.00	Rupees Two hundred thirty two only.	Rmt.	2412.80
11	(Bd/V-35, P-570, It.No.28 (a), Pg.132) of PWD DSR 2015-16	24.00	Providing and fixing ISI 1729/2002 grade 100 mm dia.Cast Iron Soil Pipes With lugs including plug bend necessary fittings such as bends, tees, single junction, double junction, slotted vent, offsets on wall or into the ground including filling joints with cement mortar 1:2 proportion fixing on wall by means of galvanized M.S. bracket of 30 x 5 mmm plate and 8 mm square rod with G.1. clamp with washer as per design, drawing and as directed to keep pipe 50 mmm away from wall including necessary scaffolding and painting the exposed faces with one coat of red lead oil paint and two coats of gray oil paint including removing the existing pipe if necessary and conveying and stacking in PWD Chowky or as directed by Engineer-in-Charge.	1665.00	Rupees One thousand six hundred sixty five only.	Rmt.	39960.00

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
12	(Bd/V-35, P-570, It.No.29 (a), Pg.133) of PWD DSR 2015-16	24.00	Providing and fixing ISI 1729/2002 grade, 75 mm dia. Cast Iron Waste Water Pipe with lugs necessary fittings such as bends, tees, single junction, double junction, slotted vent, offsets on wall or 'into the ground including filling joints with cement mortar 1 :2 proportion fixing on wall by means by galvanised M.B. bracket of 30 x 5 mm plate and 8mm square rod with G.I. clamp with washer as per design drawing and as directed to keep pipe 50 mm away from wall including necessary scaffolding and painting the exposed fees with one coat of red lead oil paint and two coats of gray oil paint including removing the existing pipe if necessary and conveying and stacking "in PWD Chowky or as directed by Engineer-in-Charge.	1331.00	Rupees one thousand three hundred thirty one only.	Rmt.	31944.00
13	(It.34(a), Pg.135, PWD DSR 2015-16)	15.00	Providing & fixing P.V.C. Soil/Waste water Pipes 110 mm outer dia. and having wall thickness of 3.2 to 3.8 mm conforming to I.S. 13592-1992 including P.V.C. plug bend, necessary fittings such as bend, tees, single junction, double junction, slotted vent offsets on walls or in the ground including fixing the pipe on wall using approved wooden cleats projecting 25 mm to 40 mm from face of wall and fixing with clips of approved quality and number, filling the joints using rubber gasket with solvent cement including necessary scaffolding, screwing, cleaning the surface and applying two coats of oil paint of approved shade and maintenance for 3 years for any leakages or dislocation of pipes. All the PVC fittings and additional two piece socket clips and screws shall got approved from Engineer in charge etc. complete (The contractors shall give 3 years guarantee bond for payment)	628.00	Rupees Six hundred twenty eight only.	Rmt.	9420.00
14	Bd/V-5, P-551 (It.-2(a), Pg-124, PWD DSR 2015- 16)	193.00	Providing and fixing G.I. Pipes 15 mm diameter heavy type having 21.3 mm outer diameter and 1.504 kilogramme per metre weight and having embossed at every metre as ISI mark and name of the manufacturer to walls, ceilings, floors etc. with screwed sockets, backnuts, elbows, tees, reducers, enlargers, plugs, clamps etc. including necessary drilling in holes in walls/slabs etc. and remaking good the demolished portion to restore the same in original condition neatly and applying primer and two coats of white oil painting including existing pipe, if necessary & conveying & stacking the same in P.W.D. chowky or as directed etc. complete.	313.00	Rupees three hundred thirteen only.	R.Mt.	60409.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
15	Bd/V-5, P-551 (It.-2(b), Pg-124, PWD DSR 2015- 16)	18.00	Providing and fixing G.I. Pipes 20 mm diameter heavy type having 26.9 mm outer diameter and 1.953 kilogramme per metre weight and having embossed at every metre as ISI mark and name of the manufacturer to walls, ceilings, floors etc. with screwed sockets, backnuts, elbows, tees, reducers, enlargers, plugs, clamps etc. including necessary drilling in holes in walls/slabs etc. and remaking good the demolished portion to restore the same in original condition neatly and applying primer and two coats of white oil painting including existing pipe, if necessary & conveying & stacking the same in P.W.D. chowky or as directed etc. complete.	321.00	Rupees Three hundred twenty one only.	R.Mt.	5778.00
16	R2-CS-PS-95-a, Page 148 of MCGM's Building Schedule/Common Schedule 2018	26.00	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) : 25 mm nominal bore.	578.00	Rupees five hundred seventy eight only.	Each	15028.00
17	(It.16, Pg.39, PWD DSR 2015-16)	3.89	Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts.	690.00	Rupees six hundred ninety only.	Cu.Mt.	2684.10
18	It.No.58, Pg.220 of PWD DSR 2015-16	140.00	C.I. Grating 100 mm dia.	52.80	Rupees fifty two point eighty only.	No.	7392.00
19	R2-CS-FL-02-b, Page 62 of MCGM's Building Schedule/Common Schedule 2018	71.00	Providing and laying polished natural stone strips upto 100mm wide as specified below (Machine cut) 25-30 mm. thick of an approved quality and size for paving /flooring including cement mortar bedding of 25 mm thick in 1:4 proportion, cement float, machine cutting, dressing, leveling, jointing, filling the joints with neat cement slurry or with required pigment, machine polishing at site, curing, finishing, etc complete as directed by Engineer In Charge.	122.00	Rupees one hundred twenty two only.	Rmt.	8662.00
20	R2-CS-WW-06-c, Page 104 of MCGM's Building Schedule/Common Schedule 2018	2.10	Providing and fixing superior quality single leaf B.W.P. grade solid core flush door 35mm thick shutter shutters of standard make conforming to IS:2202- 1991 (Part I & II) including one coat of primer, putty and 2 coats of synthetic enamel paint on both faces etc. with 12 mm thk teak wood lipping all around all around etc. complete (Hinges, aldrop & standard door hardware to be paid separately)	2131.00	Rupees Two thousand one hundred thirty one only.	Sq.Mt.	4475.10


Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
21	R2-CS-HW-04-c-2, Page 117 of MCGM's Building Schedule/Common Schedule 2018	3.00	Providing and fixing butt hinges 100 mm Long, manufactured as per relevant IS for door & windows with necessary materials and labour costs etc. complete.	134.00	Rupees one hundred thirty four only.	Nos.	402.00
22	R2-CS-HW-06-c-2, Page 119 of MCGM's Building Schedule/Common Schedule 2018	1.00	Providing and fixing aldrops of 16 mm diameter bars 300 mm long manufactured as per IS:2681-1991, wherever they apply for doors and windows with necessary materials and labour etc. complete.	398.00	Rupees Three hundred ninety eight only.	Nos.	398.00
23	R2-CS-HW-08-b-2, Page 120 of MCGM's Building Schedule/Common Schedule 2018	1.00	Providing and fixing tower bolts 150 mm long as described below conforming to IS:204- 1992 (Part I,II) for doors & windows with necessary materials and labour etc. complete.	90.00	Rupees ninety only.	Nos.	90.00
24	R2-CS-HW-09-c-1, Page 121 of MCGM's Building Schedule/Common Schedule 2018	2.00	Providing and fixing handles 100 mm long as described below, manufactured as per IS:208-1992 for doors and windows and with necessary materials and fixtures like screws etc. and all labour etc. complete.	79.00	Rupees Seventy nine only.	Nos.	158.00
25	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety Five only.	03 Copies each photo	475.00
Total Rs.							298,918.34
Say Rs.							298,918.00

(Rupees Two Lakhs Ninety Eight Thousand Nine Hundred Eighteen only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


 Executive Engineer (City)/SPPL