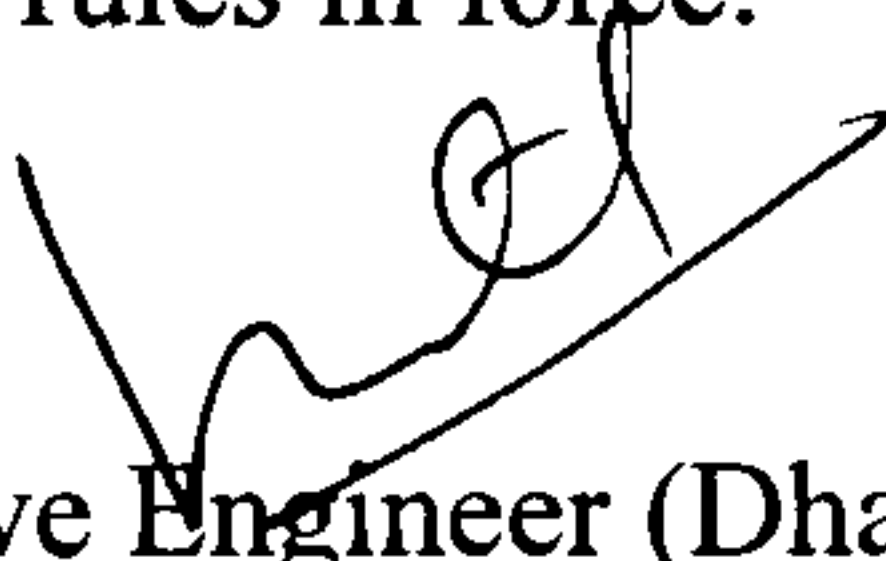


**Shivshahi Punarvasan Prakalp Ltd.**  
5<sup>th</sup> Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

**QUOTATION NOTICE**

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 28/01/2019 upt 3.00 p.m. for the work of Rectification / replacement of damaged civil, plumbing work in 9 rooms on 3rd floor & 1st floor in building no. SH-3 under S.R Scheme at Shed Complex, Dharavi, Mumbai.**
2. **The estimated cost of the work is Rs. 2,60,034.00 (Rupees Two Lakhs Sixty Thousand Thirty Four only).**
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website [www.sppl.biz](http://www.sppl.biz) from **17/01/2019 to 28/01/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5<sup>th</sup> floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 28/01/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule ‘B’ are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 30 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **60 days.**
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.
13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.

14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.

  
Executive Engineer (Dharavi),  
Shivshahi Punarvasan Prakalp Ltd.  
Mumbai- 400 051.

---

No. SPPL/ GM(Engg)/EE(Dharavi)/102/2019,  
Office of the Executive Engineer  
Shivshahi Punarvasan Prakalp Ltd.  
Griha Nirman Bhavan, Bandra (E),  
Mumbai- 400 051.

Date : 17 / 01 / 2019

**Issued to :**

M/s. \_\_\_\_\_

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL, D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.



Name of work - S.R Scheme at Shed Complex, Dharavi, Mumbai.

--- Rectification / replacement of damaged civil, plumbing work in 9 rooms on 3rd floor & 1st floor in building no. SH-3.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	Bd/W-8, P-587 (It.67, Pg.141 PWD DSR 15-16)	4.00	Removing W.C. pans including disconnecting the sanitary and water supply connections, removing and breaking flooring and bed concrete around pans and removing pan carefully and throwing our the refusal outside etc. complete.	131.00	Rs. One Hundred Thirty One only.	No.	524.00
2	Bd/V-20, P-559 (It. 18(a), Pg-129, PWD DSR 2015-16 )	4.00	Providing and fixing Orissa type white glazed earthenware 580 mm x 450 mm water closet pan including trap cast iron soil and vent pipes upto the outside face of the wall including 100 mm. Diameter cast iron plug bend, cement concrete bedding, 10 litres capacity H.D.P.E. flushing cistern with fittings, inlet pipe with stop tap, brackets, 32 mm. diameter galvanised iron heavy type flush pipe with fittings and clamps, painting in gray oil paint to the exposed pipes and cutting and making good the walls and floors etc. complete (Excluding waterproof brick bat coba)	8038.00	Rs. Eight Thousand Thirty Eight only.	No.	32152.00
3	Bd/V-30 (It.23(a), Pg.131, PWD DSR 2015-16)	2.00	Providing and fixing white glazed earthenware wash hand basin of 55 cm x 40 cm size including one cold water pillar tap, brackets, rubber plugs and brass chain, stop tap and necessary pipe connection including bottle trap and polyethylene waste water pipe upto the out side face of the wall, making good the damaged surface, testing etc. complete.	4345.00	Rs. Four thousand three hundred forty five only.	Each	8690.00
4	(It.50, Pg.138, PWD DSR 2015-16)	2.00	Providing and fixing H.D.P.E. Flushing Tank of approved quality, including removing the existing tank and disconnecting and reconnecting to water supply and drainage pipes and making good the deficiencies etc. complete.	1966.00	Rs. One Thousand nine hundred sixty six only.	No.	3932.00
5	Bd/V-8 (It.5, Pg.126, PWD DSR 2015-16)	9.00	Providing & fixing heavy type 12 mm dia. Screw down bib/stop tap of brass including socket, union nut, etc. complete.	418.00	Rs. Four Hundred eighteen only.	No.	3762.00
6	R2-CS-PS-88a, Pg.147, (MCGM's Buildings Schedule/Commo n Schedule 2018)	36.00	Providing and fixing G.I. pipes 15 mm dia nominal bore complete with G.I. fittings and clamps, i/c cutting and making good the walls etc.	231.00	Rs. Two Hundred Thirty One only.	R.Mt.	8316.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
7	R2-CS-PS-88b, Pg.147, (MCGM's Buildings Schedule/Common Schedule 2018)	18.00	Providing and fixing G.I. pipes 20 mm dia nominal bore complete with G.I. fittings and clamps, i/c cutting and making good the walls etc.	274.00	Rs. Two Hundred Seventy Four only.	R.Mt.	4932.00
8	(It.51, Pg.99, PWD DSR 2015-16)	4.32	Providing and fixing in position extruded modular aluminium section Three Track Sliding Window without powder coating made up of three track drain bottom section of size 92mm x 45mm x 1.05mm thick (1.659 Kg/Rmt) three track top and sides sections of size 92mm x 31mm x 1.3mm thick (0.933 Kg/Rmt). The shutter should be bearing bottom of size 40mm x 18mm x 1.25mm thick (0.417 Kg/Rmt) Interlocking section size of 40mm x 18mm x 1.10 mm thick (0.469 Kg/Rmt) handles section of Size 40mm x 18mm x 1.25mm thick (0.417 Kg/Rmt) with 5.5 mm thick selected quality tinted glass in shutter with approved quality neoprene, gasket P.V.C. lining etc. complete (Excluding frame).	4985.00	Rs. Four Thousand Nine Hundred Eighty Five only.	Sq.Mt.	21535.20
9	(It.50, Pg.99, PWD DSR 2015-16)	2.88	Providing and fixing in position extruded modular aluminium section Two Track Sliding Window without powder coating made up of two track drain bottom section of size 61mm x 45mm x 1.3mm thick (1.055 Kg/Rmt) and top and side sections of size 61mm x 31mm x 1.3mm thick (0.659 Kg/Rmt). The shutter should be bearing bottom of size 40mm x 18mm x 1.2mm thick (0.417 Kg/Rmt) top member of size 40 mm x 18 mm x 1.20 mm Thick (0.475 Kg/Rmt) Interlocking section size of 43mm x 27mm x 1.30 mm thick (0.558 Kg/Rmt) and handle section of size 43mm x 18mm x 1.30 mm thick (0.424 Kg/Rmt) selected quality 5.5 mm thick tinted glass to be fixed in shutter with neoprene, gasket with approved quality P.V.C. rollers, necessary locks handles, P.V.C. lining etc. complete (Excluding frame).	4567.00	Rs. Four thousand five hundred sixty seven only.	Sq.Mt.	13152.96
10	R2-CS-RM-34, Pg. 168, (MCGM's Buildings Schedule/Common Schedule 2018)	317.60	Removing white wash or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.	11.00	Rs. Eleven only.	Sq.Mt.	3493.60



Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
11	R2-CS-PN-3, Pg.56, (MCGM's Buildings Schedule/Common Schedule 2018)	317.60	Providing and applying first single coat of approved primer and two coats of acrylic distemper (oil bound distemper) of an approved make and colour as per manufacturers specifications to any surface, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting with broom by any approved means, etc. complete as directed by Engineer-in-charge.	98.00	Rs. Ninety Eight only.	Sq.Mt.	31124.80
12	R2-CS-PN-26, Pg. 193 of MCGM's Buildings Schedule / Common	110.68	Providing and applying synthetic enamel paint or flat oil paint in any required shade in 3 coats over a primer coat as per manufacturers specifications including scrapping, cleaning the surface etc. Complete.	200.00	Rs. Two Hundred only.	Sq.mt.	22136.00
13	It.No.35, Pg.65 of PWD DSR 2015-16	109.86	Washing and cleaning any kind of tiled flooring, dado with washing powder and water.	13.85	Rs. Thirteen point Eighty Five only.	Sq.Mt.	1521.56
14	R2-CS-SS-16, Pg.96, (MCGM's Buildings Schedule/Common Schedule 2018)	2.16	Providing, detailing, and fabricating as per specifications, transporting to site and erecting MS Openable / Sliding / Ornamental Entrance Gates including track and wheel, locking arrangement, fixing bolts, nuts, washers, cleats, stiffeners, gussets decorative balusters, arrow heads etc. and all necessary operations like straightening, bending, cutting, drilling, grinding, machining if specified, welding etc. complete weighing 60 to 65 kg/Sqm, including cleaning, Grinding and removing the welding burr and preparing surface and applying one coat of red oxide zinc chromate primer and one coat of Synthetic Enamel paint after fabrication and second coat of Synthetic Enamel paint after erection, with approved colour, shade and brand etc. including touching up with primer etc. complete as directed by Engineer In Charge.	7834.00	Rs. Seven Thousand Eight Hundred Thirty Four only.	Sq.Mt.	16921.44

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
15	R2-C5-SS-15, Pg.96. (MCGM's Buildings Schedule/Common Schedule 2018)	6.30	Providing, detailing, and fabricating as per specifications, transporting to site and erecting MS Openable / Sliding / Ornamental Entrance Gates including track and wheel, locking arrangement, fixing bolts, nuts, washers, cleats, stiffeners, gussets decorative balusters, arrow heads etc. and all necessary operations like straightening, bending, cutting, drilling, grinding, machining if specified, welding etc. complete weighing 25 to 30 kg/Sqm, including cleaning, Grinding and removing the welding burr and preparing surface and applying one coat of red oxide zinc chromate primer and one coat of Synthetic Enamel paint after fabrication and second coat of Synthetic Enamel paint after erection, with approved colour, shade and brand etc. including touching up with primer etc. complete as directed by Engineer In Charge.	3740.00	Rs. Three Thousand Seven Hundred Forty only.	Sq.mt.	23562.00
16	R2-C5-SS-14, Page 95 of MCGM's Building Schedule/Common Schedule 2018	23.40	Providing and fixing G.I. crimped wire mesh of required openings of size 25 mm x25 mm or of any size with main and cross wires of 10 gauge approved type as per manufacture's specifications with necessary fittings including painting with one coat of one coat of red oxide zinc chromate primer and two coats of approved synthetic enamel paint etc. complete as directed by Engineer In Charge. (Iron works will be paid separately. The clear visible area of the wire mesh exclusive overlap will be paid for).	1081.00	Rs. One Thousand Eighty One only.	Sq.Mt.	25295.40
17	R2-C5-PS-95-a, Page 148 of MCGM's Building Schedule/Common Schedule 2018	3.00	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) : 25 mm nominal bore.	578.00	Rs. Five Hundred Seventy Eight only.	Each	1734.00
18	As per wording of item.	70.30	Providing and fixing 450 mm dia. Concertina barbed razer type coil of 19 mm wide ribbon with thickness 5 SWG with antirust coating, fixed to existing U shape angle bracket etc. complete.	440.00	Rs. Four Hundred Forty one only.	RMt.	30932.00
19	(It. No. FMB 11.63 page B-54 of MCGM FMR)	0.06	Providing and fixing in position light weight M.S. Angles, tees, plates, rolled steel beams, joist and stanchions etc. including all labour and meterial in hoisting, fixing with bolts and nuts or by welding etc. complete including 3 coats of syn. Ena. paints (steel to be supplied by Municipal Corporation)	86568.00	Rs. Eighty Six Thousand Five hundred Sixty Eight only.	M.T.	5367.22


Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
20	(It.60(b), Pg.161, PWD DSR 2015-16)	10.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rs. Ninety Five only.	03 Copies each photo	950.00
<b>Total Rs.</b>							<b>260,034.18</b>
<b>Say Rs.</b>							<b>260,034.00</b>

**(Rupees Two Lakhs Sixty Thousand Thirty Four only)**

I/We hereby agree to quote \_\_\_\_\_ % Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) \_\_\_\_\_ (in words) \_\_\_\_\_

Signature of Contractor/s

  
 Executive Engineer (Dharavi)/SPPL