

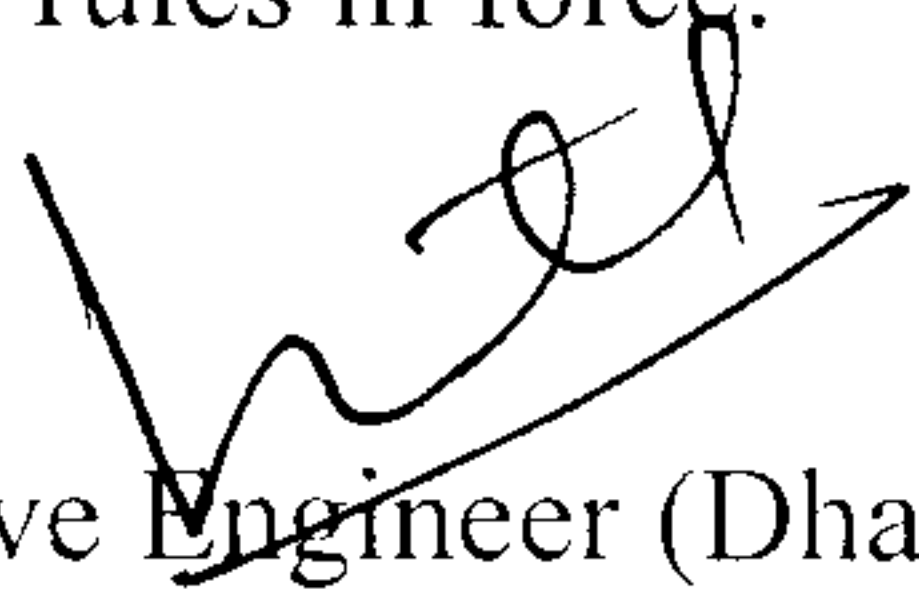
## **Shivshahi Punarvasan Prakalp Ltd.**

5<sup>th</sup> Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

### **QUOTATION NOTICE**

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 29/03/2019 upt 3.00 p.m. for the work of Supplying & erecting mains with 2x2.5 sq.mm. copper wire in PVC conduit, point wiring in 11 T/s at Ground floor of Bldg. No. SH-5, providing & fixing M.S. safety grills & M.S. Mesh for cable tray, providing & laying kotah stone flooring in meter room of Building No. SH-1, SH-5 & SH-6 under S.R Scheme at Shed Complex, Dharavi, Mumbai.**
2. **The estimated cost of the work is Rs. 2,91,853.00** (Rupees Two Lakhs Ninety One Thousand Eight Hundred Fifty Three only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website [www.sppl.biz](http://www.sppl.biz) from **18/03/2019 to 29/03/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5<sup>th</sup> floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m.** by **29/03/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule ‘B’ are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.

  
Executive Engineer (Dharavi),  
Shivshahi Punarvasan Prakalp Ltd.  
Mumbai- 400 051.

---

No. SPPL/ GM(Engg)/EE(Dharavi)/ 423 /2019,  
Office of the Executive Engineer  
Shivshahi Punarvasan Prakalp Ltd.  
Griha Nirman Bhavan, Bandra (E),  
Mumbai- 400 051.

Date : 18 / 03 / 2019

**Issued to :**

M/s. \_\_\_\_\_

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL and D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : Supplying & erecting mains with 2x2.5 sqmm copper wire in PVC conduit, point wiring in 11 T/s at Ground floor of Bldg. No. SH-5, providing & fixing M.S. safety grills & M.S. Mesh for cable tray, providing & laying kotah stone flooring in meter room of Building No. SH-1, SH-5 & SH-6 under S.R Scheme at Shed Complex, Dharavi, Mumbai.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	It. No. R2-ME-3-33-a, M & E SOR 2018.	72.00	Point wiring by using FR insulated copper conductors (alongwith same size of FR insulated copper conductor for earthing & 3 plate ceiling rose) : Carrying out point wiring in existing concealed empty conduit by using Cu wires, accessories for making complete point : Point Wiring in Existing Concealed Empty Conduit Light /Fan / Ex. fan Points.	322.00	Rupees Three Hundred Twenty Two only.	Each Pt.	23184.00
2	It. No. R2-ME-3-33-i, M & E SOR 2018.	18.00	Point Wiring in Existing Concealed Empty Conduit 15 / 5 A / 6 A Combined Power Plug Socket Point with Fuse and Indicating Lamp, One 15 Amp. SP Switch	433.00	Rupees Four Hundred Thirty Three only.	Each Pt.	7794.00
3	It. No. R2-ME-3-33-j, M & E SOR 2018.	11.00	Point Wiring in Existing Concealed Empty Conduit 5A/6A - 3/5 Pin Plug On Board	183.00	Rupees One Hundred Eighty Three only.	Each Pt.	2013.00
4	It. No. 1-3-6, Page 16 (PWD Electrical DSR 2017-18)	200.00	Supplying & erecting mains with 2x2.5 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW	66.00	Rupees Sixty Six only.	Mtr.	13200.00
5	It. No. 1-3-4, Page 15 (PWD Electrical DSR 2017-18)	200.00	Supplying & erecting mains with 2x1.5 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW. <i>Note: Rates for the earth wire shall be calculated as one half rate of mains of bunch of two wire and earth wire should be with green colour PVC. (Rs.44 Less Rs.22 = Rs. 22)</i>	22.00	Rupees Twenty Two only.	Mtr.	4400.00
6	It. No. 1-6-4, Page 22 (PWD Electrical DSR 2017-18)	330.00	Supplying & erecting mains with 2x2.5 sq.mm and earth wire 1.5 sq.mm FRLS PVC copper wire in rigid PVC conduit min.20mm dia. as per specification No: WG-MA/PC, para no. 1.4.1	153.00	Rupees One Hundred Fifty Three only.	Mtr.	50490.00

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
7	It. No. 5-1-1, Page 97 (PWD Electrical DSR 2017-18)	11.00	Supplying and erecting Insulated D.P. switch surface type/ flush type 32A 250V with indicator lamp & fuse as per specification No. SW-SWR/BDP	196.00	Rupees One Hundred Ninety Six only.	Each	2156.00
8	It. No. 2-9-4, Page 61 (PWD Electrical DSR 2017-18)	6.00	Supplying and erecting LED street light fitting suitable for above 40W to 48W lamp, including lamp, with PF> 0.95 class IP 65 and above Housing of pressure die cast alluminum alloy and heat sink extruded alluminum complete per specification No. FG-ODF/FLS2	4439.00	Rupees Four Thousand Four Hundred Thirty Nine only.	Each	26634.00
9	It. No. 2-6-5, Page 56 (PWD Electrical DSR 2017-18)	6.00	Supplying & erecting street light wall brackets made from 40 mm dia. B class G.I. pipe, 1.0 m. in length along with pole cap of 300 mm length 100 mm dia duly welded. As per specification no. FG-BKT/BPC.	833.00	Rupees Eight Hundred Thirty Three only.	Each	4998.00
10	R2-CS-EW-3, Page 3 of MCGM's Building Schedule/Common Schedule 2018	5.06	Excavation for foundation, substructures, basements, tanks, sumps, walls, chambers, manholes, trenches, poles, pits & general building works in soft/ disintegrated rock, sand stone, stiff clay, gravel, cobblestone, hard laterite, water bound macadam, wet mix macadam, asphalt mix carpet of any type, pitching, soling, paths and hardcore, lime concrete, plain cement concrete, stone masonry and all types of brick/ block masonry below ground level, rock boulders, etc. for depths/ lifts upto 1.5M measured from the ground level, including dressing/ trimming the sides, leveling of bottoms, manual dewatering, removing rank vegetation, backfilling in layers not more than 200mm thickness, watering, consolidating, compacting to achieve not less than 97% Modified Proctor density conforming to relevant IS, stacking in measurable heaps for future use within owners space or disposing within an initial lead of 150m as directed, loading, unloading, leveling excluding shoring, strutting etc. complete as directed by Engineer-in-Charge. Note: 1) The rate includes the handling/supporting the existing utilities such as cables, drains, pipes, water mains etc. 2) It also includes the royalty and other taxes if any	500.00	Rupees Five Hundred only.	Cu.Mt.	2530.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
11	Bd/E-1, P-287 (It.-1(d), Pg-13, PWD DSR 2015-16)	3.38	Providing and laying in position in situ plain cement concrete M-15 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate, retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering, shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete.	6753.00	Rupees Six Thousand Seven Hundred Fifty Three only.	Cu.Mt.	22825.14
12	R2-CS-FL-01-c, Pg.61, (MCGM's Buildings Schedule/Common Schedule 2018)	29.43	Providing and laying polished natural stone 25 to 30 mm thk. Kota stone of size 0.430m x0.56m (17"x22") (Machine cut) of an approved quality and size for paving /flooring in plain and/or diamond /approved pattern including cement mortar bedding of 25 mm thick in 1:4 proportion, cement float, machine cutting, dressing, leveling, jointing, filling the joints with neat cement slurry or with required pigment, machine polishing at site, curing, finishing, etc complete as directed by Engineer In Charge.	1179.00	Rupees One Thousand One Hundred Seventy Nine only.	Sq.Mt.	34697.97
13	It. No. 16-2-6, Page 289 (PWD Electrical DSR 2017-18)	6.00	Supplying and erecting R.C.C. chamber cover of size 750 mm x 750 mm x 50 mm thick with lifting arrangement including laying of angle iron frame of angle size as 50 x 50 x 6 mm to be fixed / embedded on top of chamber.	3335.00	Rupees Three Thousand Three Hundred Thirty Five only.	Each	20010.00
14	(It.16, Pg.39, PWD DSR 2015-16)	5.06	Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts.	690.00	Rupees Six Hundred Ninety only.	Cu.Mt.	3491.40
15	(It.4, Pg.203, PWD DSR 2015-16)	2.59	Filling trench with Grit.	1100.00	Rupees One Thousand One Hundred only.	Cu.Mt.	2849.00
16	R2-CS-SL-12-a, Pg.101, (MCGM's Buildings Schedule/Common Schedule 2018)	22.60	Providing and Fixing MS Safety grill of weight weighing 10 to 15 kg / sqm for windows as per design including fabricating the grill using M.S. square / round bar, flats and angles including painting with one coat of red oxide zinc chromate primer and two coats of synthetic enamel paint of approved colour and brand etc complete as directed.	2021.00	Rupees Two Thousand Twenty One only.	Sq.Mt.	45674.60

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
17	R2-CS-SS-14, Page 95 of MCGM's Building Schedule/Common Schedule 2018	22.60	Providing and fixing G.I. crimped wire mesh of required openings of size 25 mm x25 mm or of any size with main and cross wires of 10 gauge approved type as per manufacture's specifications with necessary fittings including painting with one coat of one coat of red oxide zinc chromate primer and two coats of approved synthetic enamel paint etc. complete as directed by Engineer In Charge. (Iron works will be paid separately. The clear visible area of the wire mesh exclusive overlap will be paid for).	1081.00	Rupees One Thousand Eighty One only.	Sq.Mt.	24430.60
18	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rs. Ninety Five only.	03 Copies each photo	475.00
<b>Total Rs.</b>							<b>291,852.71</b>
<b>Say Rs.</b>							<b>291,853.00</b>

**(Rupees Two Lakhs Ninety One Thousand Eight Hundred Fifty Three only)**

I/We hereby agree to quote \_\_\_\_\_% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) \_\_\_\_\_ (in words) \_\_\_\_\_

Signature of Contractor/s

  
 Executive Engineer (Dharavi)/SPPL