


## **Shivshahi Punarvasan Prakalp Ltd.**

5<sup>th</sup> Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

### **QUOTATION NOTICE**

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 27/05/2019 upt 3.00 p.m. for the work of Civil rectification work on First Floor in Bldg. No. 13 and in Room No. 311 of Bldg. No. 14 under S.R Scheme at Turbhe Mandale, Mankhurd, Mumbai.**
2. **The estimated cost of the work is Rs. 2,88,447.00** (Rupees Two Lakhs Eighty Eight Thousand Four Hundred Forty Seven only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Suburbs), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website [www.sppl.biz](http://www.sppl.biz) from **20/05/2019 to 27/05/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Suburbs)/SPPL, 5<sup>th</sup> floor, Griha Nirman Bhavan, Bandra (East), Mumbai - 400 051 upto **3.00 p.m.** by **27/05/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 30 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **60 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Suburbs)/SPPL as per the rules in force.

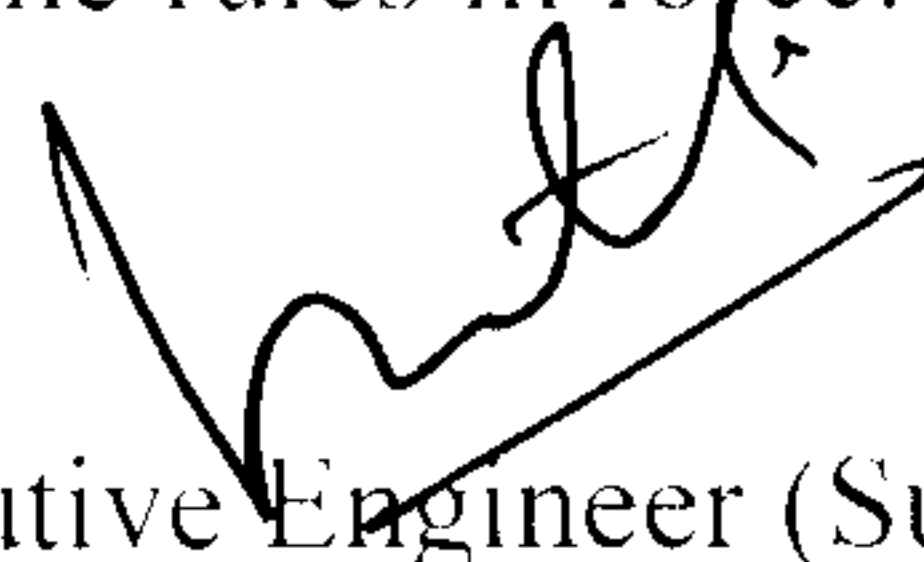

Executive Engineer (Suburbs),  
Shivshahi Punarvasan Prakalp Ltd.  
Mumbai- 400 051.

---

No. SPPL/ GM(Engg)/EE(Suburbs)/ 648 /2019,  
Office of the Executive Engineer  
Shivshahi Punarvasan Prakalp Ltd.  
Griha Nirman Bhavan, Bandra (E),  
Mumbai- 400 051.

Date : 20 / 05 / 2019

**Issued to :**

M/s. \_\_\_\_\_

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R Scheme at Turbhe Mandale, Mankhurd, Mumbai.

--- Civil rectification work on First Floor in Bldg. No. 13 and in Room No. 311 of Bldg. No. 14.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	R2-CS-RM-34, Pg. 168, (MCGM's Buildings Schedule/Common Schedule 2018)	717.20	Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete	11.00	Rupees Eleven only.	Sq.Mt.	7889.20
2	R2-CS-PN-3. Pg. 56, (MCGM's Buildings Schedule/Common Schedule 2018)	688.40	Providing and applying first single coat of approved primer and two coats of acrylic distemper (oil bound distemper) of an approved make and colour as per manufacturers specifications to any surface, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting with broom by any approved means.	98.00	Rupees Ninety Eight only.	Sq.Mt.	67463.20
3	R2-CS-PN-26, Pg. 193, (MCGM's Buildings Schedule/Common Schedule 2018)	131.58	Providing and applying synthetic enamel paint or flat oil paint in any required shade in 3 coats over a primer coat as per manufacturers specifications including scrapping, cleaning the surface etc. Complete.	200.00	Rupees Two Hundred only.	Sq.mt.	26316.00
4	It.35, Pg.65, PWD DSR 2015-16)	542.91	Washing and cleaning any kind of tiled flooring, dado with washing powder and water. (As directed by Engineer in Charge)	13.85	Rupees Thirteen point Eighty Five only.	Sq.mt.	7519.30
5	Bd/V-30 (It.23(a), Pg.131, PWD DSR 2015-16)	7.00	Providing and fixing white glazed earthenware wash hand basin of 55 cm x 40 cm size including one cold water pillar tap, brackets, rubber plugs and brass chain, stop tap and necessary pipe connection including bottle trap and polyethylene waste water pipe upto the outside face of the wall, making good the damaged surface, testing etc. complete.	4345.00	Rupees Four Thousand Three Hundred Forty Five only.	Each	30415.00



Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
6	(It.50. Pg.138, PWD DSR 2015-16)	7.00	Providing and fixing H.D.P.E. Flushing Tank of approved quality, including removing the existing tank and disconnecting and reconnecting to water supply and drainage pipes and making good the deficiencies etc. complete.	1966.00	Rupees One Thousand Nine Hundred Sixty Six only.	No.	13762.00
7	Bd/V-8 (It.5, Pg.126, PWD DSR 2015-16)	21.00	Providing & fixing heavy type 12 mm dia. Screw down bib/stop tap of brass including socket, union nut, etc. complete.	418.00	Rupees Four Hundred Eighteen only.	No.	8778.00
8	Bd/V-5, P-551 (It.-2(a). Pg-124, PWD DSR 2015-16 )	10.50	Providing and fixing G.I. Pipes 15 mm diameter heavy type having 21.3 mm outer diameter and 1.504 kilogramme per metre weight and having embossed at every metre as ISI mark and name of the manufacturer to walls, ceilings, floors etc. with screwed sockets, backnuts, elbows, tees, reducers, enlargers, plugs, clamps etc. including necessary drilling in holes in walls/slabs etc. and remaking good the demolished portion to restore the same in original condition neatly and applying primer and two coats of white oil painting including existing pipe, if necessary & conveying & stacking the same in P.W.D. chowky or as directed etc. complete.	313.00	Rupees Three Hundred Thirteen only.	R.Mt.	3286.50
9	As per wording of Item	20.16	Providing & fixing Acrylic glass panes of thickness 5 mm for M.S. windows with necessary fitting arrangements, etc. complete as directed by Engineer In Charge.	2716.00	Rupees Two Thousand Seven Hundred Sixteen only.	Sq.Mt.	54754.56
10	R2-CS-HW-06-c-2, Page 119 of MCGM's Buildings SOR 2018	7.00	Providing and fixing aldrops of 16 mm diameter bars 300 mm long manufactured as per IS:2681-1991, wherever they apply for doors and windows with necessary materials and labour etc. complete.	398.00	Rupees Three Hundred Ninety Eight only.	Nos.	2786.00

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
11	R2-CS-HW-09-d-1, Page 121 of MCGM's Buildings SOR 2018	7.00	Providing and fixing handles 100 mm long as described below, manufactured as per IS:204-1992 (Part I,II) for doors & windows with necessary materials and labour etc. complete.	64.00	Rupees Sixty Four only.	Nos.	448.00
12	(It.No.8, Pg.36) of PWD DSR 2015-16	2.19	Providing waterproof bedding 25 mm thick for flooring of bath and W.C. in cement mortar 1:3 using 1 kg of waterproofing compound of approved make and manufacture per bag of cement including leveling, curing, etc. complete.	484.00	Rupees Four Hundred Eighty Four only.	Sq.Mt.	1059.96
13	R2-CS-FL-07-a. Pg.63, (MCGM's Buildings Schedule/Common Schedule 2018)	2.19	Providing and laying 8mm thk. ceramic tiles Light coloured glazed ceramic tiles conforming to I.S.15622-2006 for flooring of an approved, quality, make, size and pattern /design, for flooring including cement mortar bedding of 25 mm thick in 1:4 proportion, neat cement float, cutting, leveling, jointing, filling the joints by neat cement slurry or approved colour grout, curing, finishing etc complete as directed by Engineer In Charge.	1701.00	Rupees One Thousand Seven Hundred One only.	Sq.Mt.	3725.19
14	(It.No46(a), Pg.97) of PWD DSR 2015-16	4.32	Providing and fixing steel windows of various sizes as per detailed draings with hot dip zinc coating without ventilator without ventilator with side hung shutters conforming to IS:1038-1975 and sections conforming to IS:7452-1982 including fabricating, glazing with 3 mm thick obscured glass panes of approved quality and all fixtures and fastenings including aluminium beading 12 mm x 12 mm weighing @ 0.148 kg per metre, scaffolding, painting etc. complete. Spec: (As directed by Engineer in Charge).	4994.00	Rupees Four Thousand Nine Hundred Ninety Four only.	Sq.Mt.	21574.08
15	R2-CS-FL-21. Page 67 of MCGM's Building Schedule/Common Schedule 2018	21.00	Providing and fixing polished natural stone tiles /slab as specified below of approved quality, pattern and colour for flush/projected skirting and risers including preparing the surface and levelling in the desired line, backing of 20 thk. cement mortar in porportion 1:3, square cut top edge or chamfered top edge in cement mortar 1:3, cement float, machine cutting, leveling, jointing, filling the joints with neat cement or pigment mixed with cement, polishing, finishing, curing etc complete as directed by Engineer In Charge.	232.00	Rupees Two Hundred Thirty Two only.	Rmt.	4872.00
16	As per wording of item (Rate Analysis).	154.99	Machine polishing to cement/marble mosaic tiled flooring or any other type of flooring flooring including cleaning, washing, etc. complete	215.00	Rupees Two Hundred Fifteen only.	Sq.Mt.	33322.85


Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
17	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety five only.	03 Copies each photo	475.00
<b>Total Rs.</b>							<b>288,446.84</b>
<b>Say Rs.</b>							<b>288,447.00</b>

**(Rupees Two Lakhs Eighty Eight Thousand Four Hundred Forty Seven only)**

I/We hereby agree to quote \_\_\_\_\_% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) \_\_\_\_\_ (in words) \_\_\_\_\_

Signature of Contractor/s

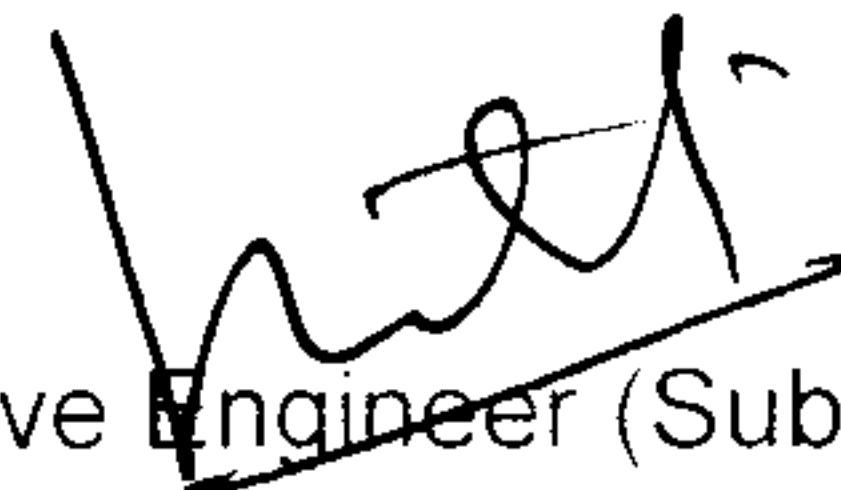  
 Executive Engineer (Suburbs)/SPPL