

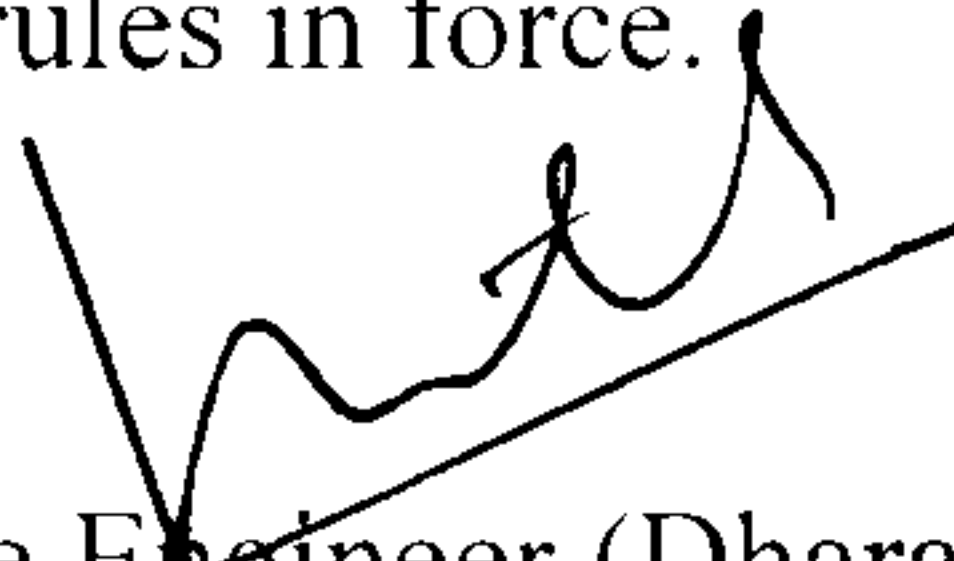
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 08/04/2019 upt 3.00 p.m. for the work of Providing & laying 300 mm dia./ 450 mm dia. NP2 class R.C.C. hume pipes to connect the water entrance chambers on existing SWD line D to L and L to O under S.R Scheme at Shed Complex, Dharavi, Mumbai.**
2. **The estimated cost of the work is Rs. 2,87,375.00** (Rupees Two Lakhs Eighty Seven Thousand Three Hundred Seventy Five only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **28/03/2019 to 08/04/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 08/04/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days.**
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.


Executive Engineer (Dharavi),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Dharavi)/ 455 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 28 / 03 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL, D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R Scheme at Shed Complex, Dharavi, Mumbai.

----Providing & laying 300 mm dia./ 450 mm dia. NP2 class R.C.C. hume pipes to connect the water entrance chambers on existing SWD line D to L and L to O.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	R2-CS-EW-4, Page 4 of MCGM's Building Schedule/Common Schedule 2018	37.32	Excavation by chiseling by manual operations, pneumatic breaker, hammer, drilling, compressor breaker, jack hammer etc. for foundations, substructures, basements, tanks, sumps, walls, chambers, manholes, poles, pits & general building works in hard rock, reinforced concrete, Bituminous macadam for depths/lifts upto 1.5M, including dressing/trimming the sides, leveling of bottoms, manual dewatering, removing rank vegetation, backfilling in layers not more than 200mm thickness, watering, consolidating, compacting to achieve not less than 97% Modified Proctor density conforming to relevant IS, stacking in measurable heaps for future use within owners space or disposing within an initial lead of 150m as directed, unloading, leveling excluding shoring, strutting etc. complete as directed by Engineer-in-Charge, loading. Note: 1) The rate includes the handling/supporting the existing utilities such as cables, drains, pipes, water mains etc. 2) It also includes the royalty and other taxes if any.	1054.00	Rupees One Thousand Fifty Four only.	Cu.Mt.	39335.28
2	R2-SE-1-2, Page 2 of MCGM's SE Schedule 2018	55.44	Providing watching fencing etc. totrench excavation perrunning meter length of trench as per drawing and as directed by Engineer.	410.00	Rupees Four Hundred Ten only.	Meter	22730.40
3	R2-SWD-157, of MCGM's Storm Water Drain Schedule 2018	5.00	Extra for pumping out water from trenches by 10 H.P. pump per shift of 8hrs. (Item to be operated in abnormal conditions with permission of competent authority.)	2394.00	Rupees Two Thousand Three Hundred Ninety Four only.	SFT	11970.00
4	Bd/E-1, P-287 (It.-1(c), Pg-13, PWD DSR 2015-16)	4.16	Providing and laying in position in situ plain cement concrete M-10 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate. retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering. shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete.	6018.00	Rupees Six Thousand Eighteen only.	Cu.Mt.	25034.88

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
5	R2-SWD-74, of MCGM's Storm Water Drain Schedule 2018	18.00	Providing and laying 300mm dia NP2 Class R.C.C. hume pipes with Collar joints conforming to IS 458:2003 and laid on approved bedding as per IS 783:1985 (reaff. 2010) including jointing the pipes and filleting with hemp and stiff mix of cement mortar 1:2, including testing of pipes at contractors costs (in presence of municipal staff) as per IS 3597 etc. complete as specified & as directed by Engineer in Charge. (excluding necessary earthwork & bedding).	1180.00	Rupees One Thousand One Hundred Eighty only.	Mtr.	21240.00
6	R2-SWD-76, of MCGM's Storm Water Drain Schedule 2018	18.00	Providing and laying 450mm dia NP2 Class R.C.C. Hume pipes with Collar joints conforming to IS 458:2003 and laid on approved bedding as per IS 783:1985 (reaff. 2010) including jointing the pipes and filleting with hemp and stiff mix of cement mortar 1:2, including testing of pipes at contractors costs (in presence of municipal staff) as per IS 3597 etc. complete as specified & as directed by Engineer in Charge. (excluding necessary earthwork & bedding).	2041.00	Rupees Two Thousand Forty One only.	Mtr.	36738.00
7	Bd/E-1, P-287 (It.-1(d), Pg-13, PWD DSR 2015-16)	16.37	Providing and laying in position in situ plain cement concrete M-15 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate, retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering, shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete.	6753.00	Rupees Six Thousand Seven Hundred Fifty Three only.	Cu.Mt.	110546.61
8	(It.16, Pg.39, PWD DSR 2015-16)	27.29	Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts.	690.00	Rupees Six Hundred Ninety only.	Cu.Mt.	18830.10
9	(It.60(b), Pg.161, PWD DSR 2015-16)	10.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety Five only.	03 Copies each photo	950.00
Total Rs.							287,375.27
Say Rs.							287,375.00

(Rupees Two Lakhs Eighty Seven Thousand Three Hundred Seventy Five only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____(in words) _____

Signature of Contractor/s


 Executive Engineer (Dharavi)/SPPL