

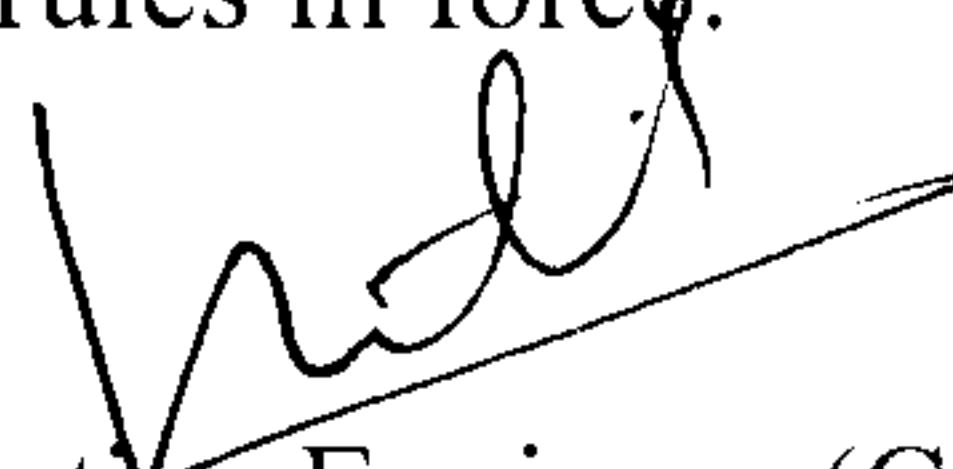
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 07/02/2019 upt 3.00 p.m. for the work of Removing existing dry/oil bound distemper and providing & applying oil bound distemper to any surface in 3 Amenity tenements at ground floor of PTC Building No. 7 under S.R Scheme at Rahul Nagar, Sewri, Mumbai.**
2. **The estimated cost of the work is Rs. 2,10,502.00** (Rupees Two Lakhs Ten Thousand Five Hundred Two only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (City), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **31/01/2019 to 07/02/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (City)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 07/02/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 30 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **60 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (City)/SPPL as per the rules in force.


Executive Engineer (City),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(City)/ 186 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 31 / 01 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R Scheme at Rahul Nagar, Sewri, Mumbai.

--- Removing existing dry/oil bound distemper and providing & applying oil bound distemper to any surface in 3 Amenity tenements at ground floor of PTC Building No. 7.

| : SCHEDULE 'B' : | | | | | | | |
|------------------|--|----------|--|-----------|---|--------|----------|
| Item. No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
| | | | | In Figure | In words | | |
| 1 | R2-CS-RM-37, Pg. 169, (MCGM's Buildings Schedule/Common Schedule 2018) | 259.14 | Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete. | 14.00 | Rupees Fourteen only. | Sq.Mt. | 3627.96 |
| 2 | R2-CS-PN-3, Pg. 56, (MCGM's Buildings Schedule/Common Schedule 2018) | 259.14 | Providing and applying first single coat of approved primer and two coats of acrylic distemper (oil bound distemper) of an approved make and colour as per manufacturers specifications to any surface, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting with broom by any approved means, etc. complete as directed by Engineer-in-charge. | 98.00 | Rupees Ninety Eight only. | Sq.Mt. | 25395.72 |
| 3 | Bd/V-5, P-551 (It.- 2(a), Pg-124, PWD DSR 2015- 16) | 32.50 | Providing and fixing G.I. Pipes 15 mm diameter heavy type having 21.3 mm outer diameter and 1.504 kilogramme per metre weight and having embossed at every metre as ISI mark and name of the manufacturer to walls, ceilings, floors etc. with screwed sockets, backnuts, elbows, tees, reducers, enlargers, plugs, clamps etc. including necessary drilling in holes in walls/slabs etc. and remaking good the demolished portion to restore the same in original condition neatly and applying primer and two coats of white oil painting including existing pipe, if necessary & conveying & stacking the same in P.W.D. chowky or as directed etc. complete. | 313.00 | Rupees Three Hundred Thirteen only. | R.Mt. | 10172.50 |
| 4 | Bd/V-30 (It.23(a), Pg.131, PWD DSR 2015-16) | 13.00 | Providing and fixing white glazed earthenware wash hand basin of 55 cm x 40 cm size including one cold water pillar tap, brackets, rubber plugs and brass chain, stop tap and necessary pipe connection including bottle trap and polyethylene waste water pipe upto the out side face of the wall, making good the damaged surface, testing etc. complete. | 4345.00 | Rupees Four Thousand Three Hundred Forty Five only. | Each | 56485.00 |

| Item No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
|----------|---|----------|--|-----------|---------------------------------------|---------|----------|
| | | | | In Figure | In words | | |
| 5 | Bd/V-8 (It.5, Pg.126, PWD DSR 2015-16) | 65.00 | Providing & fixing heavy type 12 mm dia. Screw down bib/stop tap of brass including socket, union nut, etc. complete. | 418.00 | Rupees Four Hundred Eighteen only. | No. | 27170.00 |
| 6 | R2-CS-PS-27-b, Pg.138, (MCGM's Buildings Schedule/Common Schedule 2018) | 13.00 | Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete. Flexible pipe 40 mm dia. | 87.00 | Rupees Eighty Seven only. | Each | 1131.00 |
| 7 | (It.175, Pg.225, PWD DSR 2015-16) | 13.00 | Providing and fixing PVC trap grating. | 187.00 | Rupees One Hundred Eighty Seven only. | No. | 2431.00 |
| 8 | (It.239, Pg.227, PWD DSR 2015-16) | 13.00 | Providing & fixing CPVC Coupling 50 mm dia. | 132.00 | Rupees One Hundred Thirty Two only. | Per No. | 1716.00 |
| 9 | R2-CS-RM-34, Pg.168, (MCGM's Buildings Schedule/Common Schedule 2018) | 136.30 | Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete | 11.00 | Rupees Eleven only. | Sq.Mt. | 1499.30 |
| 10 | R2-CS-PN-26, Pg.193, (MCGM's Buildings Schedule/Common Schedule 2018) | 136.30 | Providing and applying synthetic enamel paint or flat oil paint in any required shade in 3 coats over a primer coat as per manufacturers specifications including scrapping, cleaning the surface etc. Complete. | 200.00 | Rupees Two Hundred only. | Sq.mt. | 27260.00 |
| 11 | Bd/W-8, P-587 (It.67, Pg.141 PWD DSR 15-16) | 1.00 | Removing W.C. pans including disconnecting the sanitary and water supply connections, removing and breaking flooring and bed concrete around pans and removing pan carefully and throwing our the refusal outside etc. complete. | 131.00 | Rupees One Hundred Thirty One only. | No. | 131.00 |

| Item No. | Std. Specification | Quantity | Description | Rate | | Unit | Amount |
|------------------|---|----------|---|-----------|--|----------------------|-------------------|
| | | | | In Figure | In words | | |
| 12 | Bd/V-20, P-559 (It.-18(a), Pg-129, PWD DSR 2015-16) | 1.00 | Providing and fixing Orissa type white glazed earthenware 580 mm x 450 mm water closet pan including trap cast iron soil and vent pipes upto the outside face of the wall including 100 mm. Diameter cast iron plug bend, cement concrete bedding, 10 litres capacity H.D.P.E. flushing cistern with fittings, inlet pipe with stop tap, brackets, 32 mm. diameter galvanised iron heavy type flush pipe with fittings and clamps, painting in gray oil paint to the exposed pipes and cutting and making good the walls and floors etc. complete (Excluding waterproof brick bat coba) | 8038.00 | Rupees Eight Thousand Thirty Eight only. | No. | 8038.00 |
| 13 | SE-10-10, Page 25 of MCGM's Sewerage Schedule 2013 | 5.00 | Supplying and fixing 1.2m x 0.9m rectangular SFRC frame and cover with 2 nos. of SFRC covers as per drawing fixed complete to manhole as specified and directed. | 8994.00 | Rupees Eight Thousand Nine Hundred Ninety Four only. | Each | 44970.00 |
| 14 | (It.60(b), Pg.161, PWD DSR 2015-16) | 5.00 | Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size) | 95.00 | Rupees Ninety five only. | 03 Copies each photo | 475.00 |
| Total Rs. | | | | | | | 210,502.48 |
| Say Rs. | | | | | | | 210,502.00 |

(Rupees Two lakhs Ten thousand Five hundred two only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


 Executive Engineer (City)/SPPL