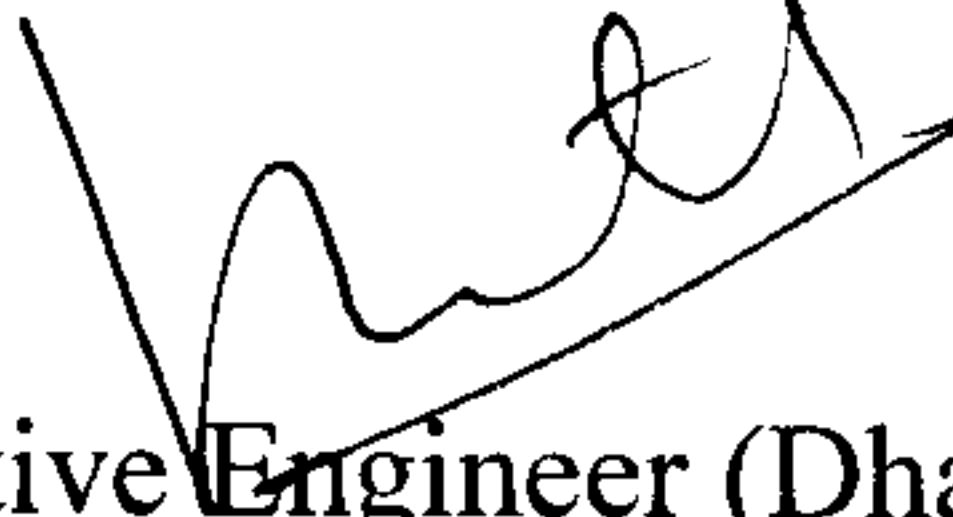


Shivshahi Punarvasan Prakalp Ltd.
5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 02/02/2019 upt 3.00 p.m. for the work of Complete rewinding and painting of submersible pump, providing & fixing in position 50 mm dia. / 40 mm dia. G.I. pipe and supply and installation of wall type weather proof make auto control panel for Bore Well etc., supplying & erecting double arm street light poles and LED street light fittings at 120 PTC tenements, Kandivali (E), Mumbai.**
2. **The estimated cost of the work is Rs. 2,96,622.00 (Rupees Two Lakhs Ninety Six Thousand Six Hundred Twenty Two only).**
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **22/01/2019 to 02/02/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 02/02/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule ‘B’ are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 60 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **120 days.**
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.


Executive Engineer (Dharavi),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Dharavi)/ 146 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 22 / 01 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL and D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

Name of Work: Complete rewinding and painting of submersible pump, providing & fixing in position 50 mm dia. / 40 mm dia. G.I. pipe and supply and installation of wall type weather proof make auto control panel for Bore Well etc., supplying & erecting double arm street light poles and LED street light fittings at 120 PTC tenements, Kandivali (E), Mumbai.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	R2-CS-EW-3, Page 3 of MCGM's Building Schedule/Common Schedule 2018	1.58	Excavation for foundation, substructures, basements, tanks, sumps, walls, chambers, manholes, trenches, poles, pits & general building works in soft/ disintegrated rock, sand stone, stiff clay, gravel, cobblestone, hard laterite, water bound macadam, wet mix macadam, asphalt mix carpet of any type, pitching, soling, paths and hardcore, lime concrete, plain cement concrete, stone masonry and all types of brick/ block masonry below ground level, rock boulders, etc. for depths/ lifts upto 1.5M measured from the ground level, including dressing/ trimming the sides, leveling of bottoms, manual dewatering, removing rank vegetation, backfilling in layers not more than 200mm thickness, watering, consolidating, compacting to achieve not less then 97% Modified Proctor density conforming to relevant IS, stacking in measurable heaps for future use within owners space or disposing within an initial lead of 150m as directed, loading, unloading, leveling excluding shoring, strutting etc. complete as directed by Engineer-in-Charge. Note: 1) The rate includes the handling/supporting the existing utilities such as cables, drains, pipes, water mains etc. 2) It also includes the royalty and other taxes if any	500.00	Rupees Five Hundred only.	Cu.Mt.	790.00
2	Bd/E-1, P-287 (lt.-1(d), Pg-13, PWD DSR 2015-16)	0.95	Providing and laying in position in situ plain cement concrete M-15 with minimum cement content of 320 Kg./Cum as per IS 456-2000 for accelerate, retard setting of concrete improve workability without imparing strength and durability. The rates shall includes bailing out water manually centering, shuttering, compacting by vibrator and curing (Excluding reinforcement) etc. complete.	6753.00	Rupees Six Thousand Seven Hundred Fifty Three only.	Cu.Mt.	6415.35

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
3	It. No. ME-10-5-d, Page 92, Mechanical & Electrical Dept. Schedule of Rate 2013.	3.00	Providing & erecting 4 m high (clear height) galvanized OCTAGONAL pole with foundation bolts having bottom of 130 mm A/F, top 70 mm A/F on provided foundation. Design, engineering, manufacture, testing at factory, packing & forwarding, delivery to site, unloading and handling at site, assembly, installation, testing and commissioning of Octagonal street light poles with embeded junction box inclusive of terminals, 3Cx 2.5 sqmm PVC insulated multistranded flexible copper cable from Junction box to the luminaires, termination at both ends and other accessories. Foundation for the pole erection and all civil works shall be in the scope of the contractor.	29581.00	Rupees Twenty Nine Thousand Five Hundred Eighty One only.	Each	88743.00
4	It. No. R2-ME-10-3-b, M & E SOR 2018.	3.00	Brackets : Double arm bracket.	5861.00	Rupees Five Thousand Eight Hundred Sixty One only.	Each	17583.00
5	It. No. ME-16-9-o, Page 116, Mechanical & Electrical Dept. Schedule of Rate 2013.	7.00	UPVC. Pipe:ISI marked - IS 4985 110 mm. 6 kgf.	346.00	Rupees Three Hundred Forty Six only.	Mtr.	2422.00
6	It. No. 2-9-4, Page 61 (PWD Electrical DSR 2017-18)	5.00	Supplying and erecting LED street light fitting suitable for above 40W to 48W lamp, including lamp, with PF> 0.95 class IP 65 and above Housing of pressure die cast alluminum alloy and heat sink extruded alluminum complete per specification No. FG-ODF/FLS2	4439.00	Rupees Four Thousand Four Hundred Thirty Nine only.	Each	22195.00
7	It. No. 7-2-2, Page 147 (PWD Electrical DSR 2017-18)	200.00	Supplying & erecting PVC armoured cable 2 core 4 sq mm copper conductor continuous 5.48 sq mm (12 SWG) G.I. earth wire complete erected with glands & lugs, on wall/ trusses/pole or laid in provided trench/ pipe as per specification no. CB-LT/CU.	202.00	Rupees Two Hundred Two only.	Meter	40400.00
8	R2-ME-15-15-f, (MCGM's Mechanical & Electrical SOR 2018)	54.90	Providing and fixing in position G.I. Heavy grade 'C' class 40 mm pipes (I.S. 1239 part I) with necessary clamping to wall beams and ceilings with hangers and clamps anchor fastners wherever required to firmly support piping	640.00	Rupees Six Hundred Forty only.	Rmt.	35136.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
9	R2-ME-11-1-f,(MCGM's Mechanical & Electrical SOR 2018)	1.00	Supplying & installation of wall type weather proof make auto control panel comprising of Voltmeter, Ammeter, SPP, powder coated 16 guage suitable rating DOL Starter, complete.	16958.00	Rupees Sixteen Thousand Nine Hundred Fifty Eight only.	No.	16958.00
10	R2-ME-8-23-b,(MCGM's Mechanical & Electrical SOR 2018)	1.00	COMPLETE REWINDING & PAINTING OF SUBMERCIBLE PUMP MOTORS WITH REPLACEMENT OF BEARINGS, NUT BOLTS (SS) ETC. For 7.5 H.P.	15273.00	Rupees Fifteen Thousand Two Hundred Seventy Three only.	Nos.	15273.00
11	R2-CS-DD-80, Pg.188, (MCGM's Buildings Schedule/Common Schedule 2018)	27.00	Removing G.I. pipes internal exposed of any size including fittings etc complete.	65.00	Rupees Sixty Five only.	Rmt.	1755.00
12	R2-ME-15-15-e,(MCGM's Mechanical & Electrical SOR 2018)	27.00	Providing and fixing in position G.I. Heavy grade 'C' class 50 mm pipes (I.S. 1239 part I) with necessary clamping to wall beams and ceilings with hangers and clamps anchor fastners wherever required to firmly support piping	863.00	Rupees Eight Hundred Sixty Three only.	Rmt.	23301.00
13	R2-ME-6-10-f,(MCGM's M & E SOR 2018)	6.00	GUN METAL NON - RETURN VALVE (SCREWED): 50 mm dia.	3903.00	Rupees Three Thousand Nine Hundred Three only.	Nos.	23418.00
14	R2-ME-1-17-ac,(MCGM's M & E SOR 2018)	1.00	Unit rate of 240V/415V, 'C' Curve, 10kA, Miniature circuit breaker suitable for DB mounting complete with connection, testing & commissioning etc. 40A DP MCB.	1758.00	Rupees One Thousand Seven Hundred Fifty Eight only.	No.	1758.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
15	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety Five only.	03 Copies each photo	475.00
Total Rs.							296,622.35
Say Rs.							296,622.00

(Rupees Two Lakhs Ninety Six Thousand Six Hundred Twenty Two only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____(in words) _____

Signature of Contractor/s


 Executive Engineer (Dharavi)/SPPL