

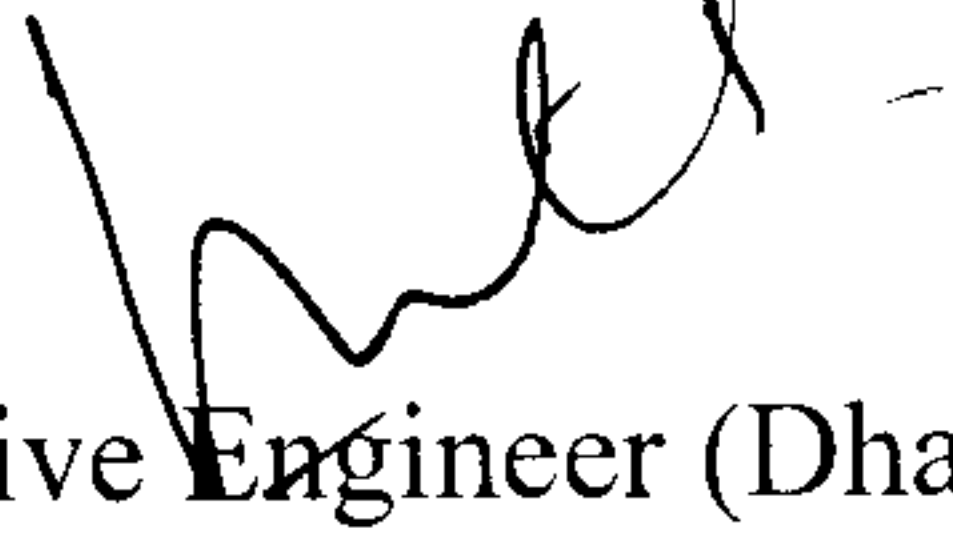
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 06/02/2019 upt 3.00 p.m. for the work of Point wiring by using F.R. insulated copper conductors (concealed/Casing N Capping) for light, fan & Bell, supplying and fixing step in fan regulator and providing & erecting & commissioning RCCB 4 pole/2 pole for lift machine room under S.R. Scheme under regulation 33(14)(D) of DCR 1991 on plot bearing C.S. No. 1/80 of Dharavi Divn. Mahim.**
2. **The estimated cost of the work is Rs. 1,47,473.00** (Rupees One Lakh Forty Seven Thousand Four Hundred Seventy Three only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **30/01/2019 to 06/02/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m.** by **06/02/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 30 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **60 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.


Executive Engineer (Dharavi),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Dharavi)/ 183 /2019,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 30 / 01 / 2019

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL, D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R. Scheme under regulation 33(14)(D) of DCR 1991 on plot bearing C.S. No. 1/80 of Dharavi Divn. Mahim.

--- Point wiring by using F.R. insulated copper conductors (concealed/Casing N Caping) for light, fan & Bell, supplying and fixing step in fan regulator and providing & erecting & commissioning RCCB 4 pole/2 pole for lift machine room.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	It. No. R2-ME-3-33-a, M & E SOR 2018.	48.00	Point wiring by using FR insulated copper conductors (alongwith same size of FR insulated copper conductor for earthing & 3 plate ceiling rose) : Carrying out point wiring in existing concealed empty conduit by using Cu wires, accessories for making complete point : Point Wiring in Existing Concealed Empty Conduit Light /Fan / Ex. fan Points.	322.00	Rupees Three hundred twenty two only.	Each Pt.	15456.00
2	It. No. R2-ME-3-33-i, M & E SOR 2018.	12.00	Point Wiring in Existing Concealed Empty Conduit 15 / 5 A / 6 A Combined Power Plug Socket Point with Fuse and Indicating Lamp, One 15 Amp. SP Switch	433.00	Rupees Four hundred thirty three only.	Each Pt.	5196.00
3	It. No. 1-2-33, Page 16 (PWD Electrical DSR 2017-18)	84.00	Supplying & erecting mains with 2x4 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW	66.00	Rupees Sixty Six only.	Meter	5544.00
4	It. No. 1-3-4, Page 15 (PWD Electrical DSR 2017-18)	84.00	Supplying & erecting mains with 2x1.5 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW. Note: Rates for the earth wire shall be calculated as one half rate of mains of bunch of two wire and earth wire should be with green colour PVC. (Rs.44 Less Rs.22 = Rs. 22)	22.00	Rupees Twenty Two only.	Mtr.	1848.00
5	It. No. 5-1-1, Page 97 (PWD Electrical DSR 2017-18)	6.00	Supplying and erecting Insulated D.P. switch surface type/ flush type 32A 250V with indicator lamp & fuse as per specification No. SW-SWR/BDP.	196.00	Rupees One Hundred Ninety Six only.	Each Pt.	1176.00
6	It. No. R2-ME-3-27-a, M & E SOR 2018.	60.00	Point wiring by using FR insulated copper conductors (alongwith same size of FRLSH insulated copper conductor for earthing & 3 plate ceiling rose) using CASING-N CAPING. For Light/Fan / Ex. Fan Points.	692.00	Rupees Six Hundred Ninety Two only.	Each Pt.	41520.00

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount	
				In Figure	In words			
7	R2-ME-4-12-t of MCGM's Mains and Submains wiring, Point wiring SOR 2018	120.00	Supply and fixing of Step type Electronic Fan Regulator minimum rated for 100W	448.00	Rupees Four Hundred Forty Eight only.	No.	53760.00	
8	It. No. 5-6-2, Page 111 (PWD Electrical DSR 2017-18)	2.00	Providing, erecting & commissioning RCCB only of electro magnetic type with 30/100/300 mA sensitivity and having capacity of 40 A. 2 pole complete as per specification No. SWRCCB/ RCCB	2435.00	Rupees Two Thousand Four hundred thirty five only.	Each	4870.00	
9	It. No. 5-6-5, Page 111 (PWD Electrical DSR 2017-18)	4.00	Providing, erecting & commissioning RCCB only of electro magnetic type with 30/100/300 mA sensitivity and having capacity of 40A. 4 pole complete as per specification No. SWRCCB/ RCCB	3057.00	Rupees Three thousand Fifty Seven only.	Each	12228.00	
10	It. No. R2-ME-3-33-j, M & E SOR 2018.	12.00	Point Wiring in Existing Concealed Empty Conduit 5A/6A - 3/5 Pin Plug On Board	183.00	Rupees One Hundred Eighty Three only.	Each Pt.	2196.00	
11	It. No. 1-3-8, Page 16 (PWD Electrical DSR 2017-18)	36.00	Supplying & erecting mains with 2x4 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW.	89.00	Rupees Eighty Nine only.	Mtr.	3204.00	
12	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees Ninety Five only.	03 Copies each photo	475.00	
Total Rs.								147,473.00
Say Rs.								147,473.00

(Rupees One Lakh Forty Seven Thousand Four Hundred Seventy Three only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s

Executive Engineer (Dharavi)/SPPL