

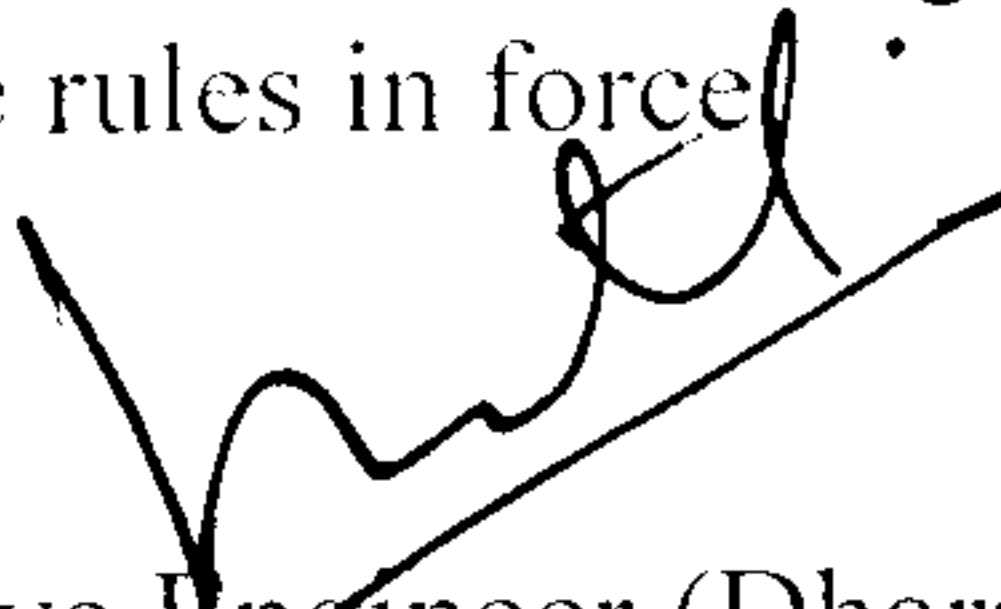
## **Shivshahi Punarvasan Prakalp Ltd.**

5<sup>th</sup> Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

### **QUOTATION NOTICE**

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 16/08/2019 upt 3.00 p.m. for the work of Providing & erecting M.S. gate at entrance near existing BMC dispensary under S.R Scheme at Shed Complex, Dharavi, Mumbai.**
2. **The estimated cost of the work is Rs. 1,58,847.00** (Rupees One Lakh Fifty Eight Thousand Eight Hundred Forty Seven only).
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Dharavi), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website [www.sppl.biz](http://www.sppl.biz) from **08/08/2019 to 16/08/2019 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Dharavi)/SPPL, 5<sup>th</sup> floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 upto **3.00 p.m. by 16/08/2019** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule ‘B’ are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 45 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **90 days**.
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.
13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.

14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Dharavi)/SPPL as per the rules in force.

  
Executive Engineer (Dharavi),  
Shivshahi Punarvasan Prakalp Ltd.  
Mumbai- 400 051.

---

No. SPPL/ GM(Engg)/EE(Dharavi)/ 1059 /2019.  
Office of the Executive Engineer  
Shivshahi Punarvasan Prakalp Ltd.  
Griha Nirman Bhavan, Bandra (E),  
Mumbai- 400 051.

Date : 08 / 08 / 2019

**Issued to :**

M/s. \_\_\_\_\_

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to S.E./SPPL, D.E./SPPL for information & necessary action

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R. Scheme at Shed Complex, Dharavi, Mumbai.

--- Providing & erecting M.S. gate at entrance near existing BMC dispensary.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	R2-CS-DD-3, Pg.180, (MCGM's Buildings Schedule/ Common Schedule 2018)	0.67	Demolishing brick work in lime or cement mortar including plaster, paint, etc. manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge.	484.00	Rs. Four Hundred Eighty Four only.	Cu.Mt.	324.28
2	R2-CS-DD-2, Pg.180, (MCGM's Buildings Schedule/ Common Schedule 2018)	1.45	Demolishing R.C.C. slab, R.C.C. wall of any thickness, R.C.C. beams, joists, R.C.C. columns, piles, pile caps etc., in any thickness and size manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in- charge.	1837.00	Rs. One Thousand Eight Hundred Thirty Seven only.	Cu.Mt.	2663.65
3	R2-CS-EW-4, Page 4 of MCGM's Building Schedule/Comm on Schedule 2018	3.17	Excavation by chiseling by manual operations, pneumatic breaker, hammer, drilling, compressor breaker, jack hammer etc. for foundations, substructures, basements, tanks, sumps, walls, chambers, manholes, poles, pits & general building works in hard rock, reinforced concrete, Bituminous macadam for depths/lifts upto 1.5M, including dressing/trimming the sides, leveling of bottoms, manual dewatering, removing rank vegetation, backfilling in layers not more than 200mm thickness, watering, consolidating, compacting to achieve not less than 97% Modified Proctor density conforming to relevant IS, stacking in measurable heaps for future use within owners space or disposing within an initial lead of 150m as directed, unloading, leveling excluding shoring, strutting etc. complete as directed by Engineer-in-Charge, loading. Note: 1) The rate includes the handling/supporting the existing utilities such as cables, drains, pipes, water mains etc. 2) It also includes the royalty and other taxes if any.	1054.00	Rs. One Thousand Fifty Four only.	Cu.Mt.	3341.18
4	Bd/A-12. P.264 (It.10, Pg.7, PWD DSR 2015-16)	0.66	Providing dry trap / rubble stone soling 15cm to 20cm thick including hand packing and compacting etc. complete.	915.00	Rs. Nine Hundred Fifteen only.	Cu.Mt.	603.90

Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
5	Bd/E-1, P-287 (It.1(c), Pg.13, PWD DSR 15-16)	0.51	Providing and laying in situ plain cement concrete M-10 of trap metal for foundation and bedding including bailing out water manually, formwork, compacting and curing	6018.00	Rs. Six Thousand Eighteen only.	Cu.Mt.	3069.18
6	Bd/F-1, P-297 (It.1, Pg.15, PWD DSR 15-16)	0.65	Providing and casting in situ cement concrete M-20 of trap metal for R.C.C. work in foundation like raft, strip, grillage foundation and footing of R.C.C. Columns and steel stanchions including bailing out water manually, centering, formwork, compacting, finishing and curing. The rate is inclusive of rectification of honeycombed patches if observed by patching the honeycombed surface by polymer mortar using quartz sand 1:3 and injecting polymer grout with 2 kg. per square centimeter pressure by hand operated grout pump after 28 days of casting. (Excluding mild steel reinforcement and structural steel).	7291.00	Rs. Seven Thousand Two Hundred Ninety One only.	Cu.Mt.	4739.15
7	CS-31 (MCGM's DSR 08-09)	0.03	Supply, cut, bend and fix in position High Yield strength Deformed bars for all diameters coming to IS 1786, including tying with binding wire (16 SWG Annealed wire) or welding, tested steel reinforcement for all reinforced concrete at all locations and levels, including transporting, handling etc. complete. No separate payment for chairs, laps, wastage and binding wire will be made.	80539.00	Rs. Eighty Thousand Five Hundred Thirty Nine only.	M.T.	2416.17
8	(It. No. FMB 11.63 page B-54 of MCGM FMR)	0.42	Providing and fixing in position light weight M.S. Angles, tees, plates, rolled steel beams, joist and stanchions etc. including all labour and material in hoisting, fixing with bolts and nuts or by welding etc. complete including 3 coats of syn. Ena. paints (steel to be supplied by Municipal Corporation)	86568.00	Rs. Eighty Six Thousand Five Hundred Sixty Eight only.	M.T.	36358.56
9	R2-CS-SS-16, Pg.96, (MCGM's Buildings Schedule/Comm on Schedule 2018)	13.05	Providing, detailing, and fabricating as per specifications, transporting to site and erecting MS Openable / Sliding / Ornamental Entrance Gates including track and wheel, locking arrangement, fixing bolts, nuts, washers, cleats, stiffeners, gussets decorative balusters, arrow heads etc. and all necessary operations like straightening, bending, cutting, drilling, grinding, machining if specified, welding etc. complete weighing 60 to 65 kg/Sqm, including cleaning, Grinding and removing the welding burr and preparing surface and applying one coat of red oxide zinc chromate primer and one coat of Synthetic Enamel paint after fabrication and second coat of Synthetic Enamel paint after erection, with approved colour, shade and brand etc. including touching up with primer etc. complete as directed by	7834.00	Rs. Seven Thousand Eight Hundred Thirty Four only.	Sq.Mt.	102233.70

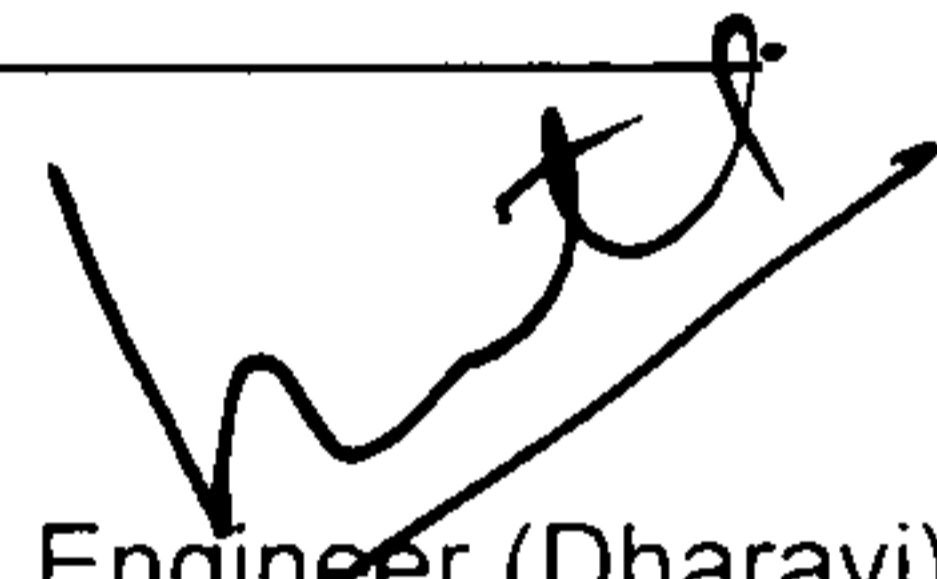
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
10	(It.16, Pg.39, PWD DSR 2015-16)	3.80	Removing any kind of debris including loading in truck and conveying to dumping point approved by BMC, unloading, spreading etc. complete. With all leads and lifts.	690.00	Rs. Six Hundred Ninety only.	Cu.Mt.	2622.00
11	(It.60, Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rs. Ninety Five only.	03 Copies each photo	475.00
<b>Total Rs.</b>							<b>158,846.77</b>
<b>Say Rs.</b>							<b>158,847.00</b>

**(Rupees One Lakh Fifty Eight Thousand Eight Hundred Fourty Seven only)**

I/We hereby agree to quote \_\_\_\_\_% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) \_\_\_\_\_(in words) \_\_\_\_\_

Signature of Contractor/s

  
 Executive Engineer (Dharavi)/SPPL