

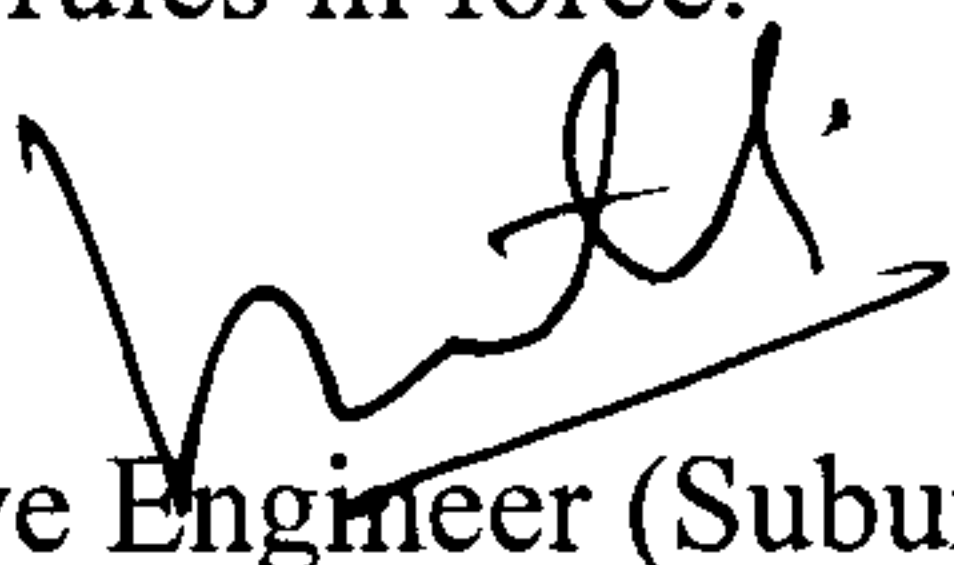
Shivshahi Punarvasan Prakalp Ltd.

5th Floor, Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051.

QUOTATION NOTICE

1. Quotations in sealed covers are invited from the Contractors so as to reach the office of the undersigned at Shivshahi Punarvasan Prakalp Ltd. Griha Nirman Bhavan, Bandra (E), Mumbai- 400 051 **on or before 31/01/2020 upto 3.00 p.m. for the work of Removing existing paint, providing & applying oil bound distemper paint in 28 tenements at Ground floor, 1st floor & 2nd floor and providing & fixing two track aluminum sliding window at passage towards MHADA Colony side of PTC Building under S.R. Scheme at R-3 (SRD-S-4), Near Bldg. No. 89, Mankhurd, Mumbai - 43.**
2. **The estimated cost of the work is Rs. 2,99,668.00 (Rupees Two lakhs Ninety Nine Thousand Six Hundred Sixty Eight only).**
3. The quotations in sealed cover shall be addressed to the Executive Engineer (Suburbs), Shivshahi Punarvasan Prakalp Ltd., Griha Nirman Bhavan, Bandra (East), Mumbai- 400 051. The blank quotations can be downloaded from the tender section of SPPL website www.sppl.biz from **24/01/2020 to 31/01/2020 upto 2.00 p.m.**
4. The quotationer shall quote in ink his percentage offer above/below or at par the estimated cost both in figures and words. The quotation should be submitted in a single sealed Envelope containing forwarding letter, quotation notice and duly filled Schedule-B and signed on each page.
5. The name of work for which quotations have been given should be stated clearly on the envelope containing the quotation and name of Contractor should be written on lower left of envelope.
6. The sealed quotation will be received by the office of Executive Engineer (Suburbs)/SPPL, 5th floor, Griha Nirman Bhavan, Bandra (East), Mumbai – 400 051 **upto 3.00 p.m. by 31/01/2020** and will be opened at **3.30 p.m.** on the same day as far as possible in the presence of the contractors/their representatives whosoever remain present at that time.
7. The quantities as shown in Schedule 'B' are approximate. The payment will be made as per actual quantity of work done.
8. The acceptance of quotation shall rest with the competent authority who reserves the right to reject any or all the quotations without assigning any reason for doing so.
9. The quotation submitted by the quotationer shall be binding on him for a period of 90 days from the last date of receipt of quotation.
10. No alternation in the form of quotation or schedule of quantities, specifications shall be entertained.
11. The entire work is to be completed within **180 days.**
12. The work shall be carried out in accordance with I.S. specifications for the particular items and as per the detailed specifications mentioned in Schedule-B.

13. The rates quoted shall be inclusive of all taxes, Octroi Duty and free delivery at site of work and nothing extra shall be paid on any account.
14. The quotationer is advised to visit and examine the site of work and its surroundings before quoting the rate and acquaint themselves with the site conditions.
15. The contractor will have to make his/ their own arrangement at his/their cost for office and stores and safeguard the materials brought on the work and the materials issued by the department if any.
16. The contractor shall provide all labors, tools, pegs, watering and all other materials as required for line out and setting out the layout etc. for the work without claiming any payment.
17. After the completion of the work, the contractor shall remove forthwith all his/ their serviceable and un-serviceable materials from site of work and other debris shall be dumped and leveled as ordered within the scope of work if so ordered without any extra cost.
18. No escalation shall be paid to the contractor.
19. The successful quotationer shall have to enter into A-1 Agreement with the Executive Engineer (Suburbs)/SPPL as per the rules in force.


Executive Engineer (Suburbs),
Shivshahi Punarvasan Prakalp Ltd.
Mumbai- 400 051.

No. SPPL/ GM(Engg)/EE(Suburbs)/ 124 /2020,
Office of the Executive Engineer
Shivshahi Punarvasan Prakalp Ltd.
Griha Nirman Bhavan, Bandra (E),
Mumbai- 400 051.

Date : 24 / 01 / 2020

Issued to :

M/s. _____

Copy submitted to G.M. (Finance)/SPPL for information.

Copy submitted to Dy.CE/SPPL for information.

Copy f.w.c's to Accounts Officer/SPPL for information.

Copy to D.E./SPPL, S.E./SPPL for information & necessary action.

Copy to Notice Board/SPPL.

✓ Copy to M/s. IMPAQ TECHNOLOGIES PVT. LTD. for publishing quotation notice along with Schedule-B on SPPL website.

NAME OF WORK : S.R. Scheme at R-3 (SRD-S-4), Near Bldg. No. 89, Mankhurd, Mumbai - 43.

--- Removing existing paint, providing & applying oil bound distemper paint in 28 tenements at Ground floor, 1st floor & 2nd floor and providing & fixing two track aluminum sliding window at passage towards MHADA Colony side of PTC Building.

: SCHEDULE 'B' :							
Item. No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
1	CS-RM-34, Pg.168, (MCGM's Buildings Schedule/Common Schedule 2018)	1746.81	Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.	11.00	Rupees Eleven only.	Sq.Mt.	19214.91
2	CS-PN-3, Pg.56, (MCGM's Buildings Schedule/Common Schedule 2018)	2507.40	Providing and applying first single coat of approved primer and two coats of acrylic distemper (oil bound distemper) of an approved make and colour as per manufacturers specifications to any surface, at all height and locations as directed including scaffolding, cleaning and preparing surfaces for painting with broom by any approved means, etc. complete as directed by Engineer-in-charge.	98.00	Rupees ninety eight only.	Sq.Mt.	245725.20
3	(It.50, Pg.99, PWD DSR 2015-16)	7.50	Providing and fixing in position extruded modular alluminium section two track Sliding Window mounted on rectangular frame of size 63 mm x 38mm x 2.00 mm thick (1.054 Kg/Rmt) made up of two track drain bottom section of size 61 mm x 45 mm x 1.3 mm thick (1.055 kg/Rmt) and top and sides sections of size 61 mm x 31 mm x 1.3 mm thick (0.659 kg./Rmt.) The shutter should be of bearing bottom of size 40 mm x 18 mm x 1.25 mm thick (0.417 Kg/Rmt) top member of size 40 mm x 18 mm x 1.20 mm thick (0.475 kg/Rmt) Interlocking section size of 43 mm x 27 mm x 1.30 mm thick (0.558 kg/Rmt) and handle section of size 43 mm x 18 mm x 1.30 mm thick (0.424 kg./Rmt), selected quality 5.5 mm thick clear glass to be fixed in shutter with neoprene gasket with approved quality PVC rollers, necessary locks, handles, PVC lining and wooden encasement wherever necessary etc. complete without powder coating.	4567.00	Rupees four thousand five hundred sixty seven only.	Sq.Mt.	34252.50

Item No.	Std. Specification	Quantity	Description	Rate		Unit	Amount
				In Figure	In words		
4	(It.60(b), Pg.161, PWD DSR 2015-16)	5.00	Shooting of still photographs outdoor and indoor of construction and other works of building, bridges, roads, etc. in district and outside district at any distance. (Still Photo 4" x 6" size)	95.00	Rupees ninety five only.	03 Copies each photo	475.00
Total Rs.							299,667.61
Say Rs.							299,668.00

(Rupees Two Lakhs Ninety Nine Thousand Six Hundred Sixty Eight only)

I/We hereby agree to quote _____% Above/Below or At par with the estimated cost put to the tender.

Therefore, the amount (in figure) _____ (in words) _____

Signature of Contractor/s


 Executive Engineer (Suburbs)/SPPL